


PULSE GENERATOR

PERFORMANCE CHECK

Model: 1920-2A-C-P-LAM 0.1VX-33A-MI-LA11A

S.N.: 6072 + 6076

Date: OCT 29 1991

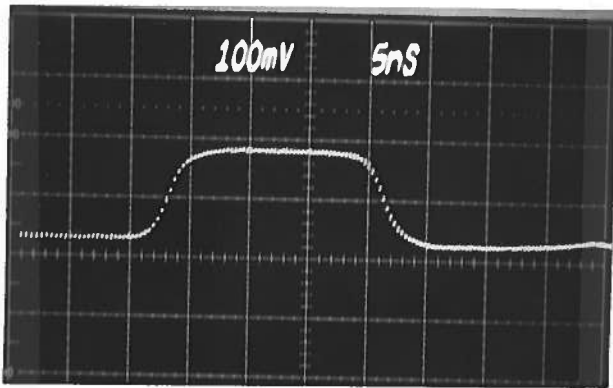

- a) Output signal amplitude:
0 to +5 Amps
- b) Pulse width:
5 to 50 ns
- c) Rise time:
 ≤ 2 ns
- d) Fall time:
 ≤ 2 ns
- e) PRF:
10, 20 + 1000 Hz.
- f) Jitter, stability:
OK
- g) Prime power:

ME output to
30 db

~3.2 VOLTS/DIV

~5.0 AMPS

SILICON DIODE (IN439A)

USED TO SIMULATE

DIODE LOAD.

120/240 Volts,
50-60 Hz

[Signature]