

PULSE GENERATOR

PERFORMANCE CHECK


Model: *PRMR-2-C-TRF-ED-P*

S.N.: *6477*

Date: *OCT 14 1992*



Ⓐ 40 dB ATTEN.: 10 VOLTS/DIV
TOP TR, TF LOW
BOT TR, TF HIGH

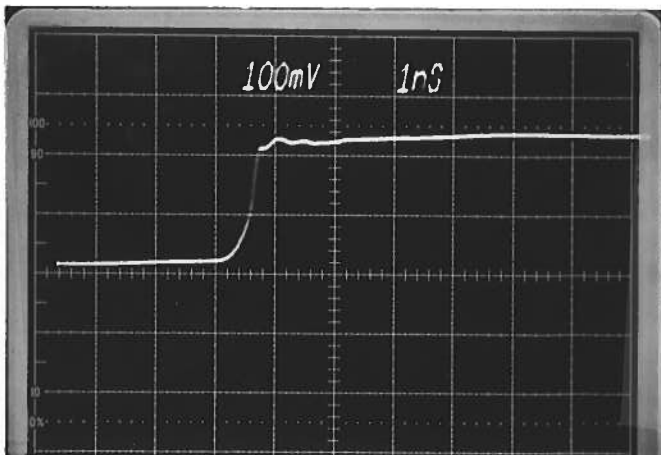

Ⓑ 40 dB ATTEN.: 10 VOLTS/DIV
TR, TF LOW
(RISE TIME)

- a) Output signal amplitude:
0 TO +20 VOLTS
- b) Pulse width: *TO 50 ns*
- c) Rise time: *20 TO 200 ns*
(20% MAX DUTY CYCLE)
LOW: ≤ 300 ns
- d) Fall time: *176 ns*
LOW: ≤ 300 ns
- e) PRF: *176 Hz*
0 TO 10 MHz
(20% MAX DUTY CYCLE)
- f) Jitter, stability:
OK
- g) Prime power:
120/200 VOLTS
5V-60 Hz
- h) OFFSET: *0 to ±5 VOLTS*