



PULSE GENERATOR
PERFORMANCE CHECK

Model: AVR-GI-C-P-EMRA
S.N.: 6894
Date: DEC. 17, 1993

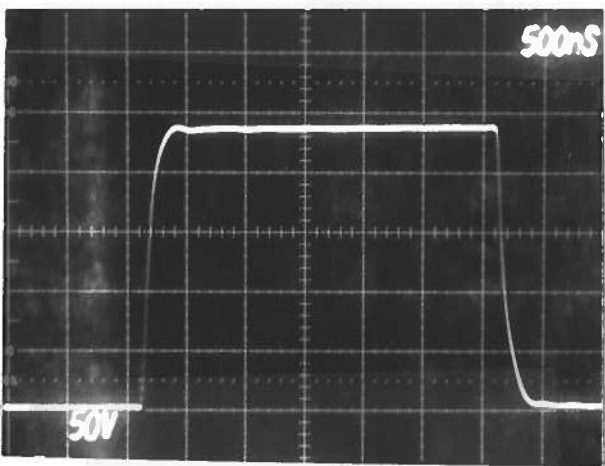

A) $R_L = 10\text{ K}$
 $C_L = 1000\text{ pfd}$
 $\text{PRF} = 10\text{ kHz}$

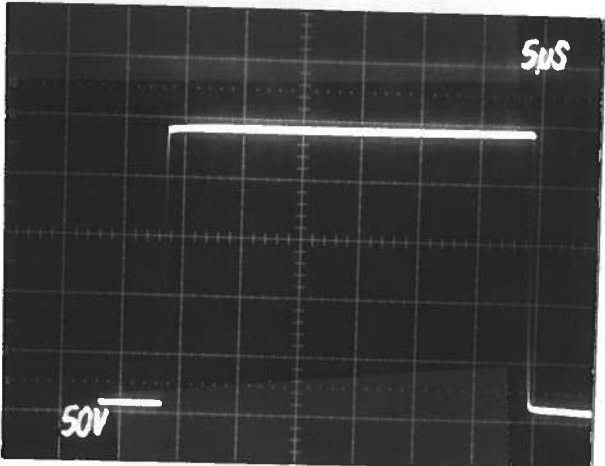

B) AS A) BUT 5 µS

- a) Output signal amplitude:
0 TO +240 VOLTS
TO $R_L \geq 10\text{ K}$
- b) Pulse width:
3 TO 30 µS
- c) Rise time:
 $\leq 100\text{ NS}$ ($C_L = 1000\text{ pfd}$)
- d) Fall time:
 $\leq 100\text{ NS}$ ($C_L = 1000\text{ pfd}$)
- e) PRF:
1 TO 10 kHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240 VOLTS
50-60 Hz

A handwritten signature or set of initials in the bottom right corner of the page.