


PULSE GENERATOR  
PERFORMANCE CHECK

Model: *AVO-9E-C-TRF-P-MI-MV-MP*

S.N.: *6901*

Date: *APRIL 6 94*

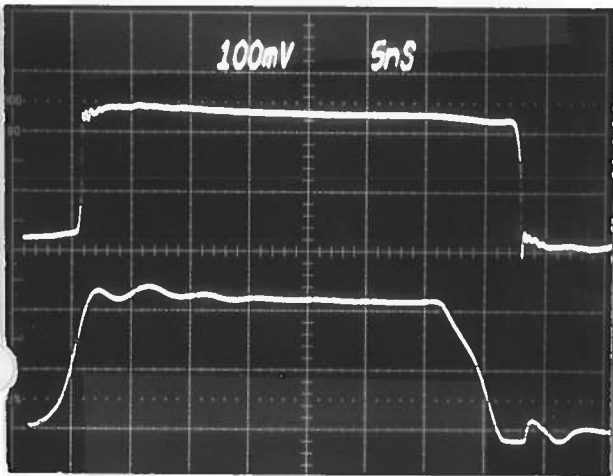


TR  
TF  
LOW

TR  
TF  
HIGH

- a) Output signal amplitude:  
*0 TO +400 mV*
- b) Pulse width:  
*70 TO 200 nS*
- c) Rise time:  
*(10% MAX DUTY CYCLE)  
≤ 300ps or ≤ 3 nS*
- d) Fall time:  
*≤ 300ps or ≤ 3 nS*
- e) PRF: *0 TO 10 MHz  
(10% MAX DUTY CYCLE)*
- f) Jitter, stability:  
*OK*
- g) Prime power:  
*120/240 VAC  
50-60 Hz*

① MAIN SIGNAL OUT TO 50 Ω  
*10 VOLT/DIV  
PRF = 1.0 MHz*

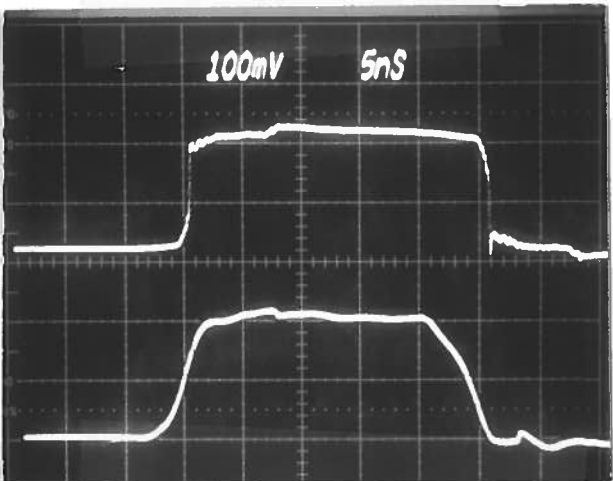

TR  
TF  
LOW

TR  
TF  
HIGH

② MI OUT 200mA/DIV