


PULSE GENERATOR
PERFORMANCE CHECK

Model: *APR-65-C-EE1*

S.N.: *6994*


Date: *APRIL 25 1994*

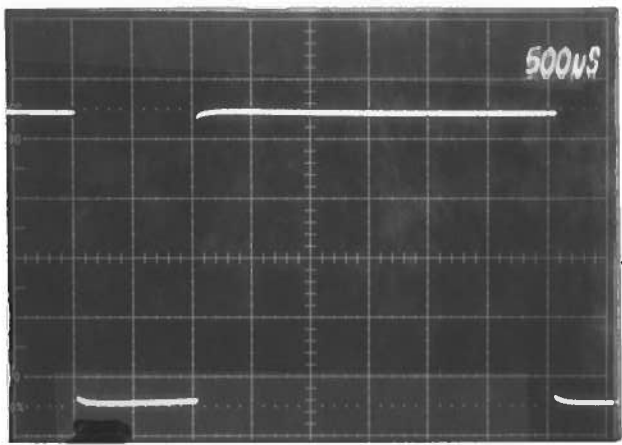

← 50V

- a) Output signal amplitude:
0 TO ±250 V_{pk}
- b) Pulse width: *R_L ≥ 100K*
100 NS TO 1.0 MS
- c) Rise time:
≤ 30 NS
- d) Fall time:
≤ 30 NS
- e) PRF:
0 TO 1 KHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240 V
50-60 Hz

ⓐ *100 VOLTS/DIV*
500 NS/DIV
R_L = 100K
PW ≈ 1ms

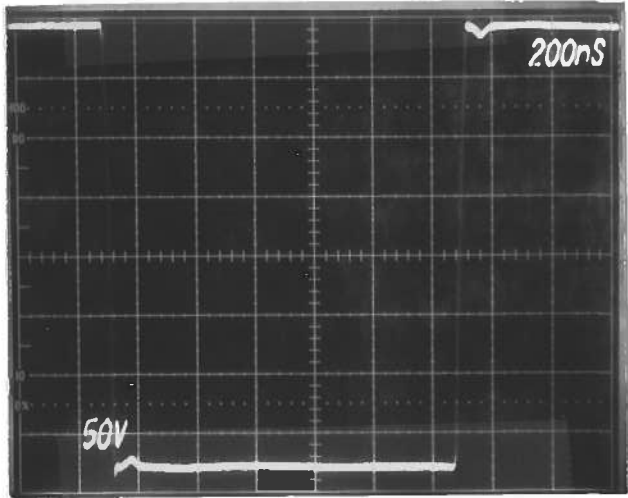

← 50V

ⓑ *AS* ⓐ *BUT*
50V/DIV
200 NS/DIV
PW ≈ 1.2us

[Signature]