


PULSE GENERATOR
PERFORMANCE CHECK


Model: *AWO-9C-C-N-TR*

S.N.: *7444*

Date: *SEPT 26*

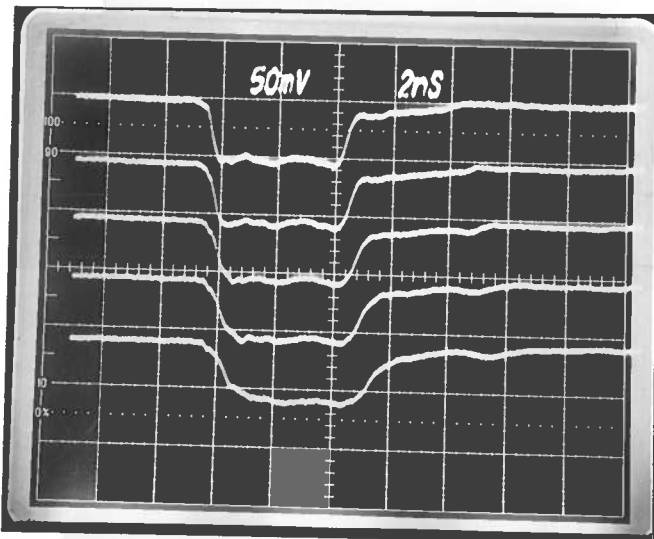

(A) MAIN FLAME OUT TO 50mV
40 dB ATTN (≈ 5 VOLTS/DIV)
FIVE SETTINGS OF TR SWITCH

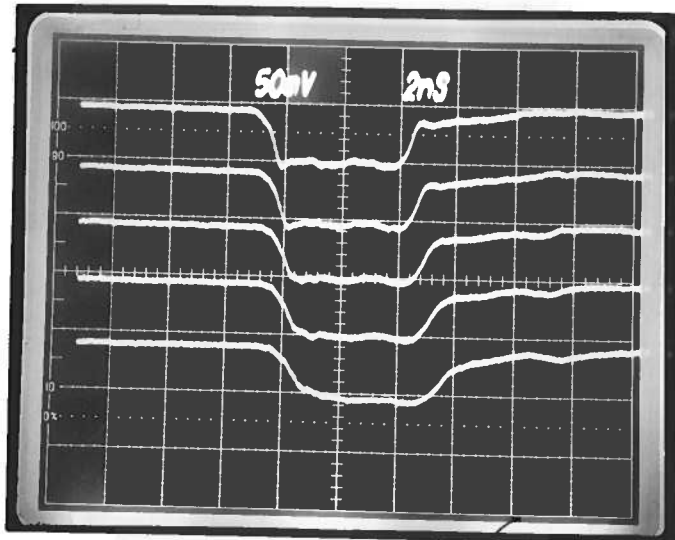

(B) ME out of AX-51 TO 20dB
(≈ 100 mA/DIV). FIVE SETTINGS
OF TR SWITCH

- a) Output signal amplitude:
0 TO -100 mA
- b) Pulse width:
0.5 TO 10 NS
- c) Rise time:
0.3 TO 2.0 NS
- d) Fall time:
0.3 TO 2.0 NS
- e) PRF:
0 TO 25 Mhz
- f) Jitter, stability:
OK
- g) Prime power:

120/240 V
50-60 Hz
[Signature]

PRF
= 12 Mhz FOR A + B.