


PULSE GENERATOR
PERFORMANCE CHECK

Model: AVP-25-P-05-ECL

S.N.: 7451

Date: SEPT. 22/95

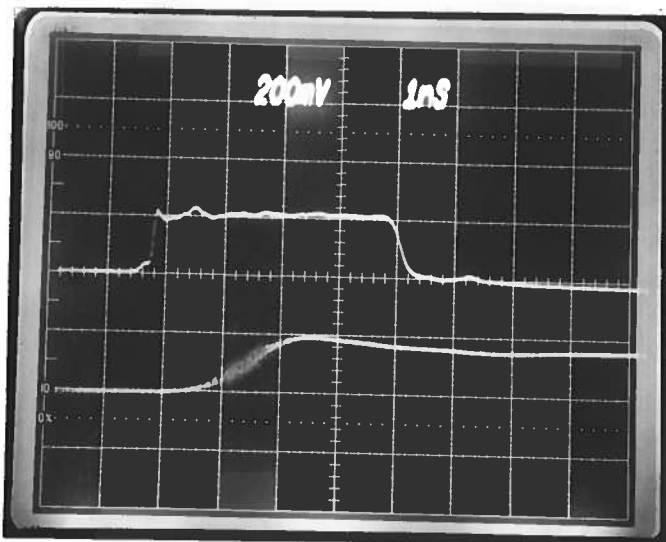

- a) Output signal amplitude:
0 TO +2 VOLTS
- b) Pulse width:
0.2 TO 4.0 NS
- c) Rise time:
1 NS/DIV ≤ 40 PS
- d) Fall time:
50 PS/DIV ≤ 135 PS
- e) PRF:
0 TO 1.0 MHZ
- f) Jitter, stability:
OK
- g) Prime power:
+15 VOLTS
400 mA (MAX)

20 dB ATTEN

\therefore 2 VOLTS/DIV

PRF = 1.0 MHZ

$$T_{RT} = \sqrt{T_{R25}^2 + T_{SCOPE}^2 + T_{ATTEN}^2}$$

≈ 50 PS (20-80%)

$T_{OPE} = 25$ PS

18 GHz ATTEN + CABLES

\therefore CONC THAT $T_{R25} \leq 40$ PS