


PULSE GENERATOR
PERFORMANCE CHECK


Model: *AVO-6C-C-P-M2*

S.N.: *7730*

Date: *SEPT 12 1996*

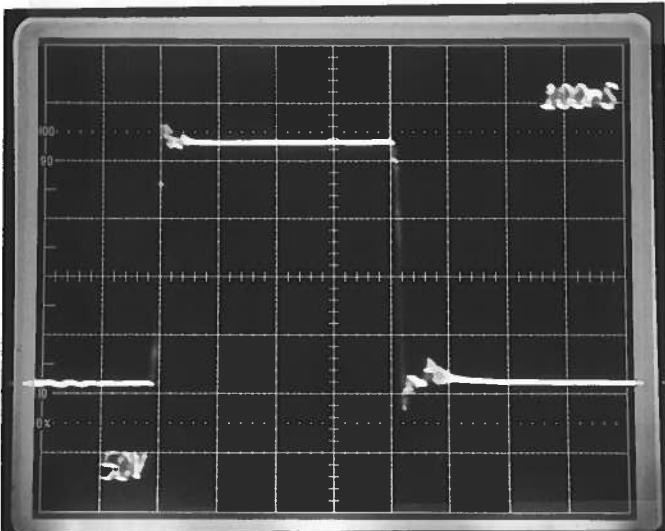

(A) MAIN FILAMENT OUT TO
50 OHMS

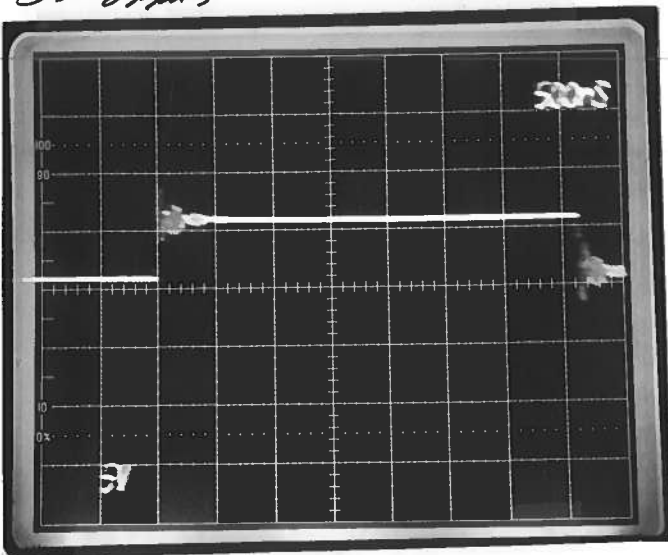

(B) AVO-6C-T1 OUT TO
DIODE IN SERIES
WITH 1Ω.

- a) Output signal amplitude:
0 TO 5 AMP S
- b) Pulse width:
50 NS TO 5.04 S
(1% MAX DUTY CYCLE)
- c) Rise time:
≤ 10 NS
- d) Fall time:
≤ 10 NS
- e) PRF: *0 TO 10 KHz*
(1% MAX DUTY CYCLE)
- f) Jitter, stability:
0 LL
- g) Prime power: *100 ± 10% Volts*
50-60 Hz.

