


PULSE GENERATOR  
PERFORMANCE CHECK

Model: AVP-25-P-05-ECL

S.N.: 7797

Date: JAN 31 1997

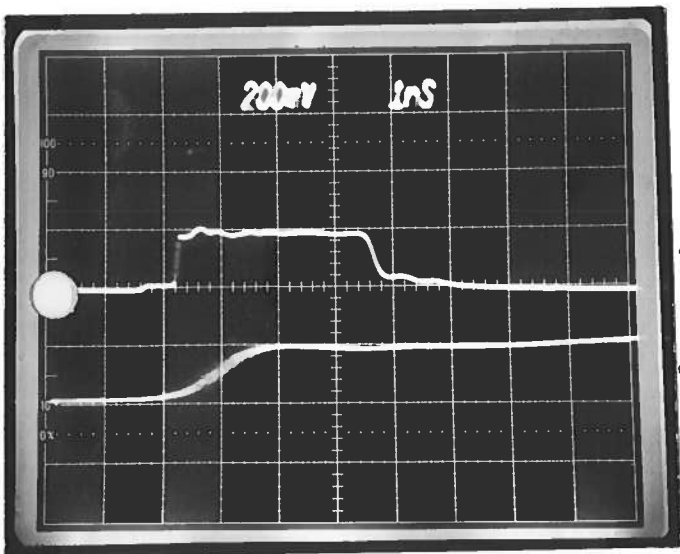

1NS/DIV

50PS/DIV

- a) Output signal amplitude:  
0 TO +2 VOLTS
- b) Pulse width:  
0.2 TO 4.0 NS
- c) Rise time:  
≤ 40 PS
- d) Fall time:  
≤ 135 PS
- e) PRF:  
0 TO 1.0 MHZ
- f) Jitter, stability:  
OK
- g) Prime power:  
+ 15 VOLTS  
400 mA (max.)

20 dB ATTEN  
∴ 2 VOLTS / DIV  
PRF = 1.0 MHZ

$$T_{RT} = \sqrt{T_{R25}^2 + T_{SCOPE}^2 + T_{ATTEN}^2}$$

$$\approx 50 \text{ PS (20-80\%)}$$

$$T_{SCOPE} = 25 \text{ PS}$$

18 GHz ATTEN + CABLES

∴ CONCL THAT  $T_{R25} \leq 40 \text{ PS}$