
PULSE GENERATOR

PERFORMANCE CHECK

Model: AVO-2-C-BE03-R5-P-OPI-M

S.N.: 8880

Date: TUNG) 1999

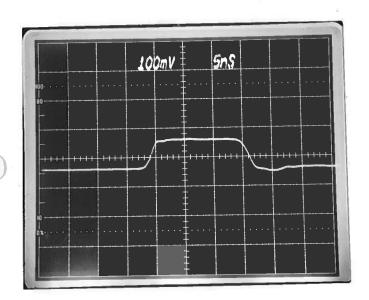

MONITOR OUT TO 40 dB 100V/DIV, 2 FIMP/DIV 5 NS/DIV

AVO-2T-BEO2B3 CONNECTED VIA A & METER CABLE IN459A IN SERIES WITH I I USED AS TEST LOAD. PRF = 20 kHz

Output signal amplitude: a) 0 TO +2 AMP Pulse width: b) 17 NS Rise time: 🦯 c) SZ NS Fall time: d) E2 NS PRF: e) O TO ZO KHZ Jitter, stability: f) OK ~ Prime power: g) 120/240V, 50-60 Hz A