PULSE GENERATOR

PERFORMANCE CHECK

Model: AVO-2-C-BE03-R5-P-OPI-M

S.N.: 8883

Date: JUNE 7 1999

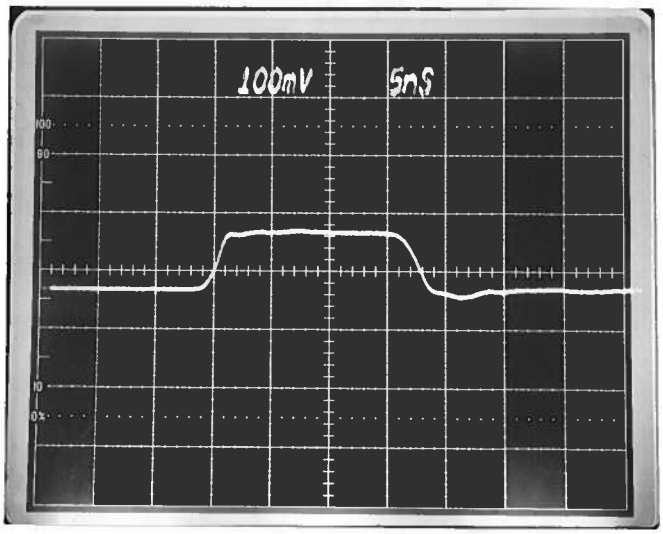

a) Output signal amplitude:
0 TO +2 AMP

b) Pulse width:
17 NS

c) Rise time:
≤2 NS

d) Fall time:
≤2 NS

e) PRF:
0 TO 20 kHz

f) Jitter, stability:
OK

g) Prime power:
120/240V, 50-60 Hz

MONITOR OUT TO 40 dB
100V/DIV, 2 AMP/DIV
5 NS/DIV

AVO-2T-BE02B3 CONNECTED
VIA A 8 METER CABLE
IN459A IN SERIES WITH
1 Ω USED AS TEST LOAD.
PRF = 20 kHz