
PULSE GENERATOR

PERFORMANCE CHECK

Model: AVO-2-C-BE03-R5-P-0PI-M

S.N.: 8385

Date: DEZ 20 1999

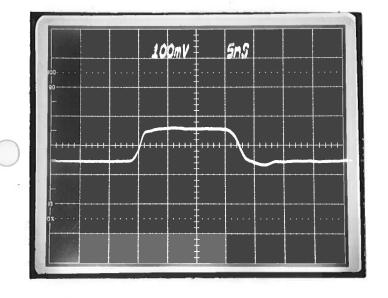

MONITOR OUT TO 40 dB 100V/DIV, 2 AMP/DIV 5 NS/DIV

AVO-2T-BEO2B3 CONNECTED VIA A 8 METER CABLE IN459A IN SERIES WITH I I USED AS TEST LOAD. PRF = 20 kHz

a) Output signal amplitude: 0 TO +2 AMP Pulse width: b) 17 NS c) Rise time: ER NS d) Fall time: E2 NS e) PRF: O TO 20 kHz f) Jitter, stability: OK g) Prime power: 120/240V, 50-60 Hz