


PULSE GENERATOR

PERFORMANCE CHECK

Model: *AVO -6D-B-P*

S.N.: *8962*

Date: *SEPT 15 1999*

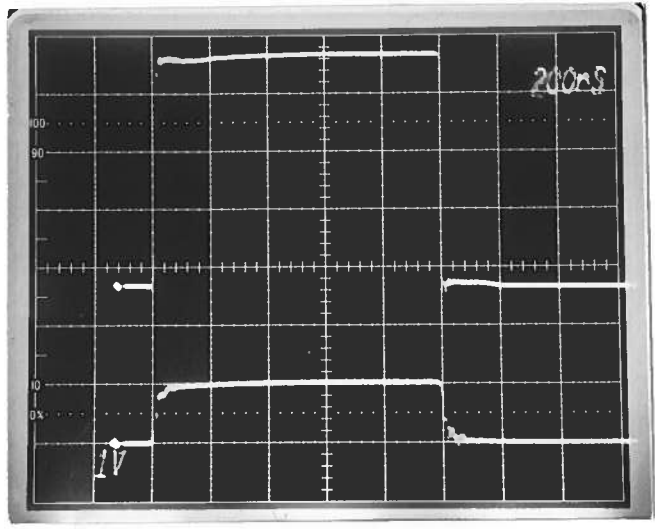

- a) Output signal amplitude: *0 TO +10 Amp*
- b) Pulse width: *50 NS TO 5.0 US*
(0.5% MAX DUTY CYCLE)
- c) Rise time: *≤ 10 NS*
- d) Fall time: *≤ 10 NS*
- e) PRF: *0 TO 10 KHz*
(0.5% MAX DUTY CYCLE)
- f) Jitter, stability: *OK*
- g) Prime power: *120 / 240 V*
50 - 60 Hz.

TOP MAIN FRAME OUT
TO 50 Ω. 50V/DIV
200 NS/DIV

BOI AVO-6D-T OUTPUT
(PEARSON 2878 CURRENT
TRANSFORMER MONITORING
CURRENT THROUGH A
1N5819 DIODE TEST LOAD)
1 V/DIV (10 Amp/DIV)
200 NS/DIV