


PULSE GENERATOR
PERFORMANCE CHECK

Model: AV-1020-C


S.N.: 10524

Date: December 5, 2002

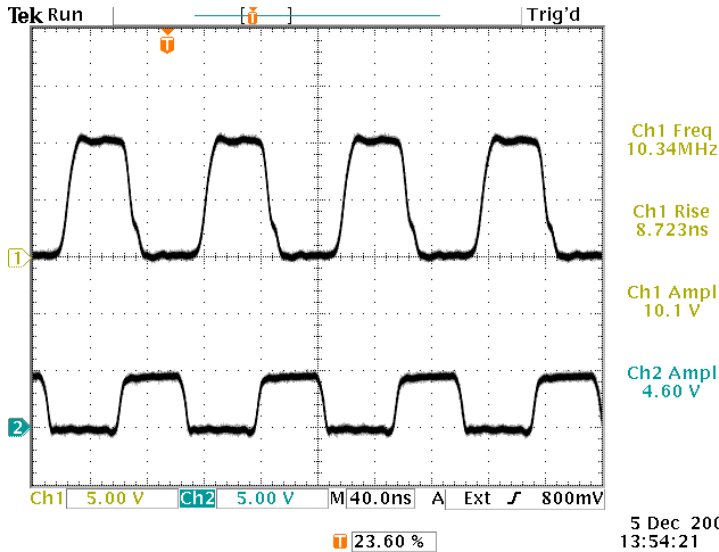

Top: Main OUT, +10V amplitude, 0V offset, into 50Ω
Bottom: TTL-inverted out.
Both: 5V/div, 40 ns/div

- a) Output Signal Amplitude: 0 to ±10V
- b) Pulse Width: 50 ns - 500 ms
- c) Rise Time: 10 ns
- d) Fall Time: 10 ns
- e) PRF: 1Hz - 10 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 120/240V AC, 50-60 Hz,

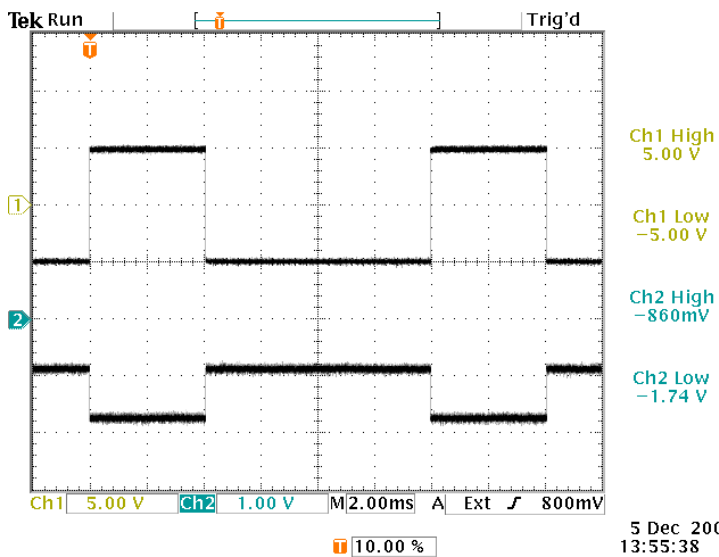

Top: Main OUT, +10V amplitude, -5V offset, into 50Ω
Bottom: ECL-inverted out, 1V/div
Both: 2 ms/div