



P.O. BOX 265 OGDENSBURG, NY U.S.A. 13669-0265 TEL: (315) 472-5270 FAX: (613) 226-2802

TEL: 1-800-265-6681 FAX: 1-800-561-1970


e-mail: info@avtechpulse.com http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE OTTAWA, ONTARIO CANADA K2C 3H4 TEL: (613) 226-5772 FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AVR-9D-B-P S.N.: 10827 Date: February 10, 2004


Narrow Pulse Test

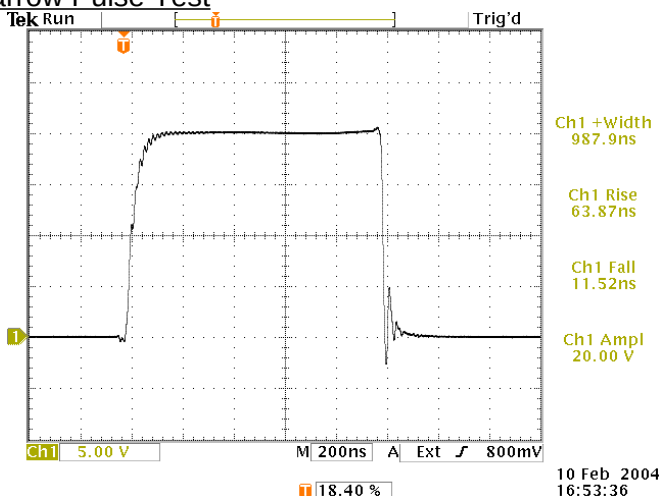

1 kHz, 1 us, +20V into a 1.0Ω load. 5 V/div, 200 ns/div.

- a) Output Signal Amplitude: 0 to +20V, to ≥ 1Ω b) Pulse Width: 200 ns – 200 us, ≤ 10% duty cycle c) Rise Time: < 80 ns d) Fall Time: < 80 ns e) PRF: 1 Hz - 5 kHz f) Jitter, Stability: OK g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

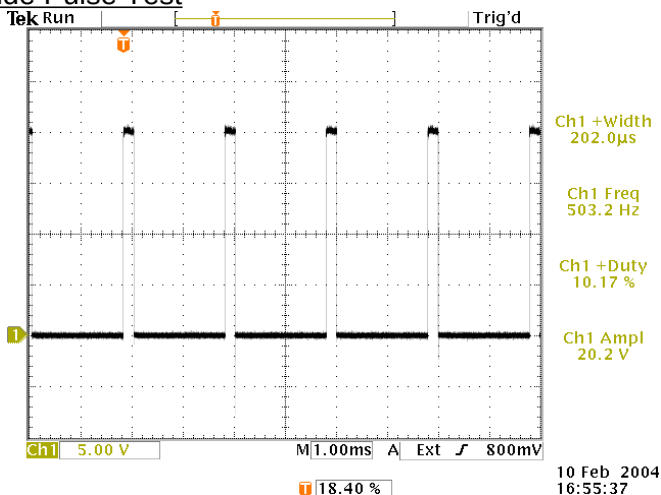

500 Hz, 200 us, +20V into a 1.0Ω load. 5 V/div, 1 ms/div.

References levels: 10%, 90%.