



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVMP-4-B-AK1-PN-R5
Type: Ultra-High-Speed Pulse Generator
S.N.: 12093
Date: October 22, 2008



Output Amplitude: 0 to ±10V, to 50Ω
Pulse Width (FWHM): 10 ns – 10 μs
Rise Time (20%-80%): ≤ 200 ps
Fall Time (80%-20%): ≤ 200 ps
PRF: 1 Hz - 1 MHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms


Leading edge at 10 kHz, 100 ns, +10V,
1 ns/div. 5 V/div (50 mV × 40 dB):

Trailing edge at 10 kHz, 100 ns, +10V,
1 ns/div. 5 V/div (50 mV × 40 dB):

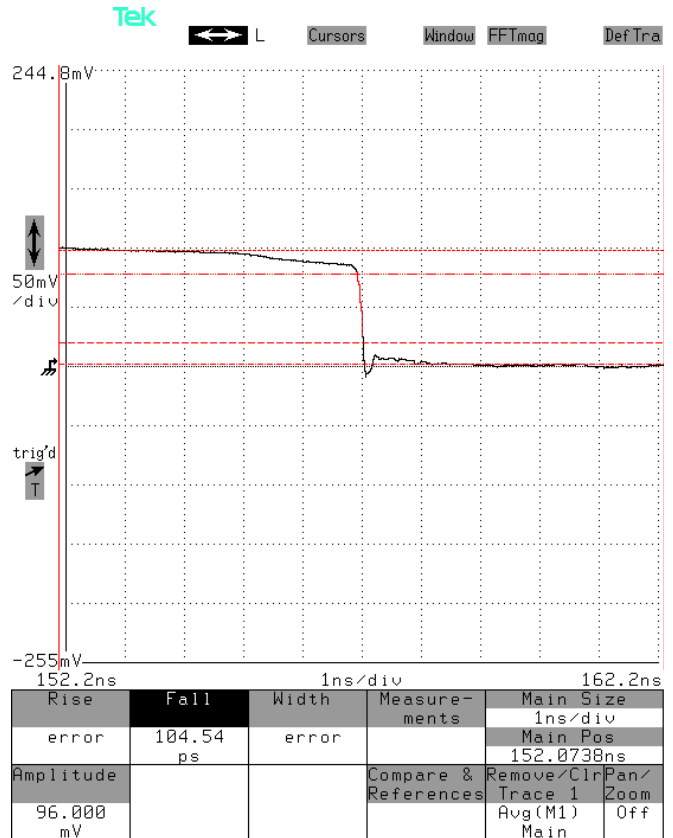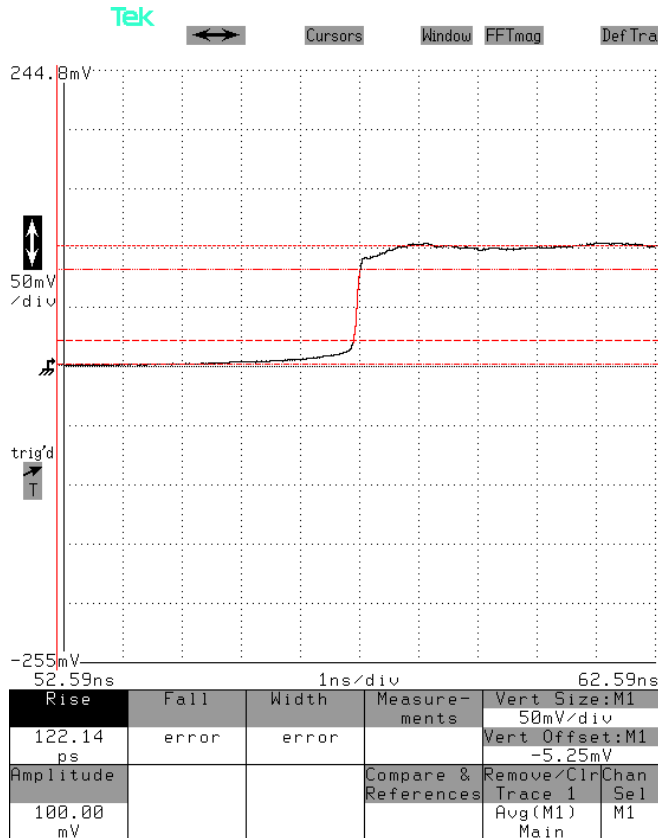


Full pulse at 5 kHz, 10 us, -10V,

2 us/div. 5 V/div (50 mV × 40 dB):

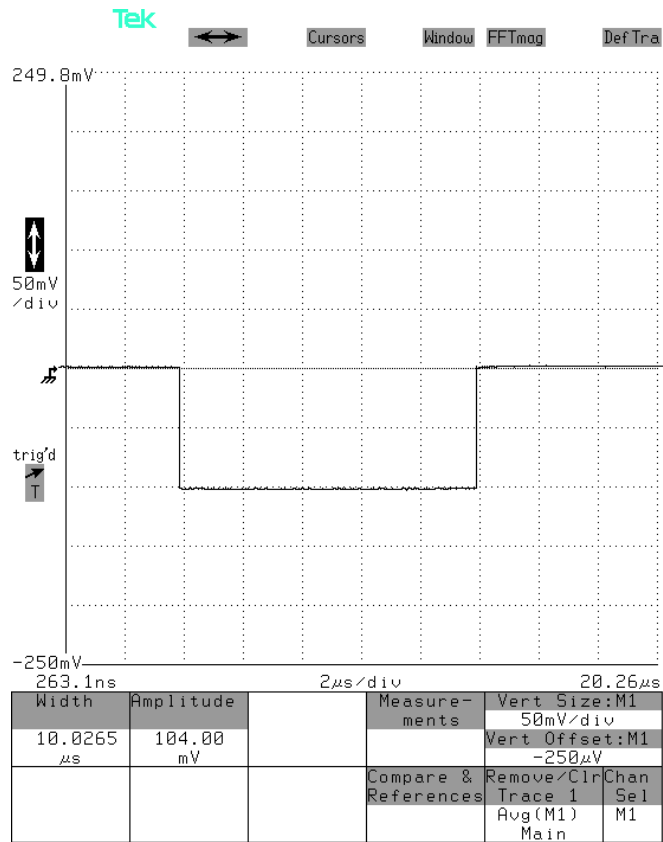


Leading edge at 5 kHz, 10 us, -10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

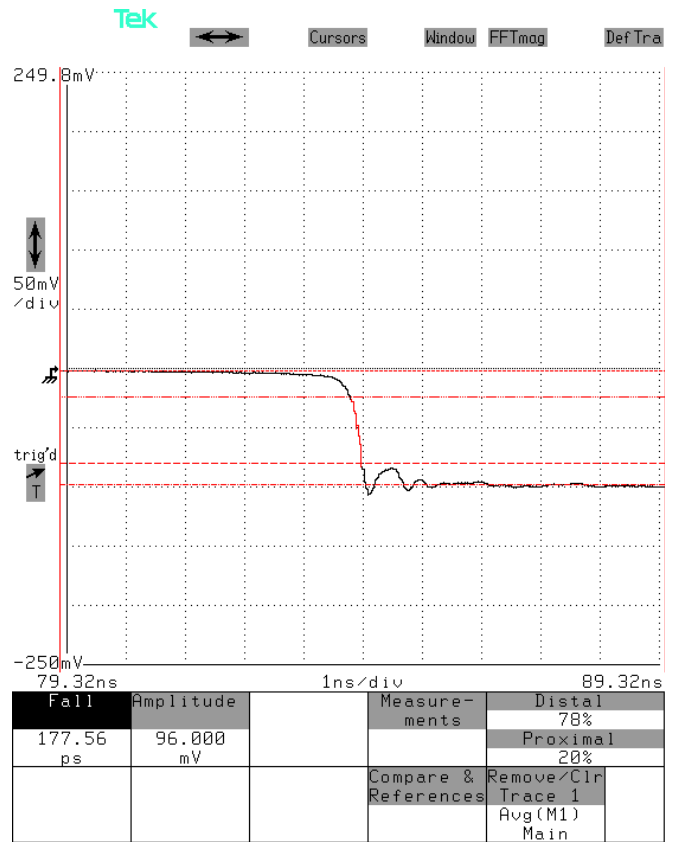

Trailing edge at 10 kHz, 500 ns, -10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

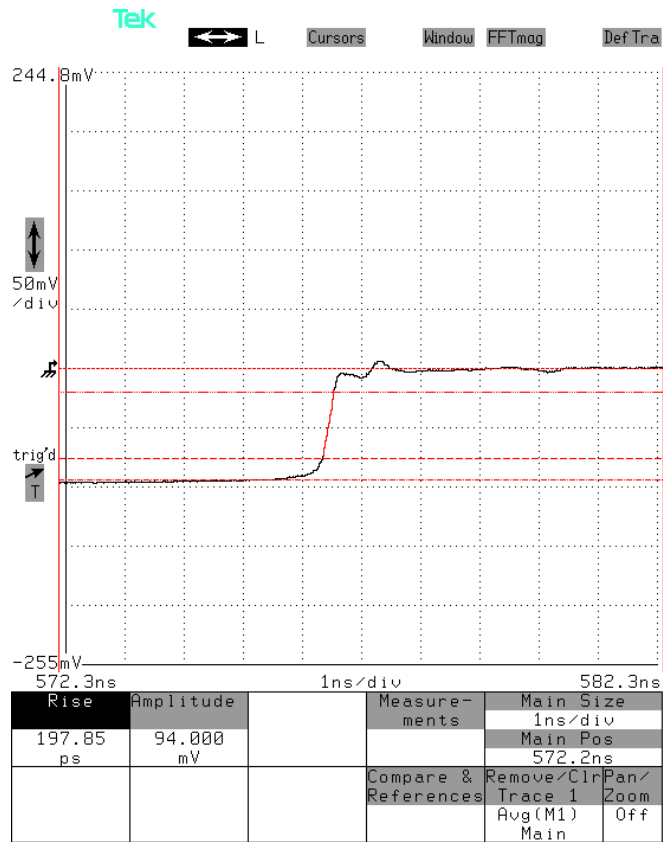

Trailing edge at 5 kHz, 1 us, +10V,

1 ns/div. 5 V/div (50 mV × 40 dB):

