



AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS
SINCE 1975

□ P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

☒ BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVN-1-C-P-AC02
Type: Ultra-High-Speed Pulse Generator
S.N.: 12348
Date: November 13, 2009


Max. Output Amplitude: 5V
Pulse Width (FWHM): 0.2 – 1 ns (< 200 MHz)
Rise Time (20%-80%): ≤ 100 ps
Fall Time (80%-20%): ≤ 150 ps (< 200 MHz)
PRF: 25 - 250 MHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms


At 25 MHz and < 0.2 ns, > 5V:

200 ps/div. 2 V/div (20 mV × 40 dB):

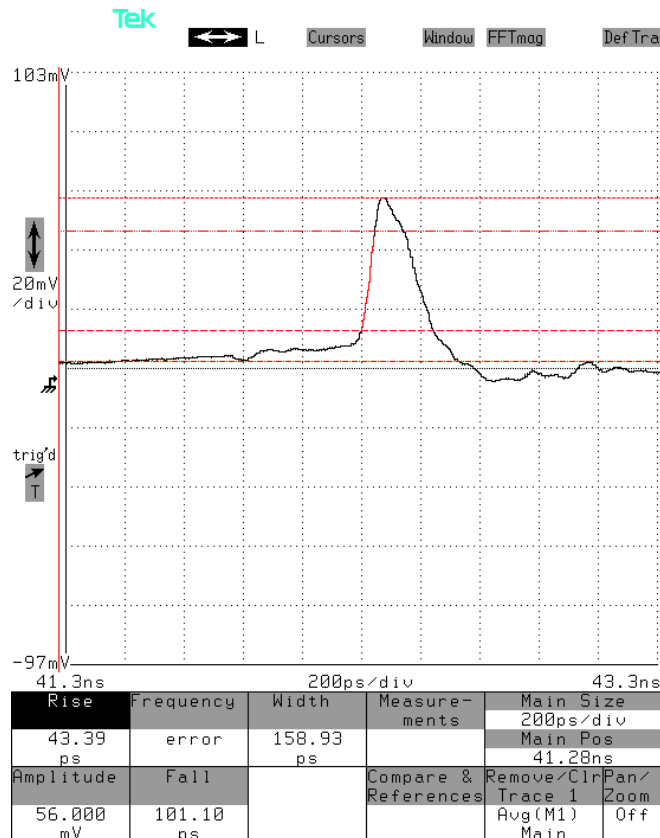


At 25 MHz and > 1 ns, > 5V:

500 ps/div. 2 V/div (20 mV × 40 dB):

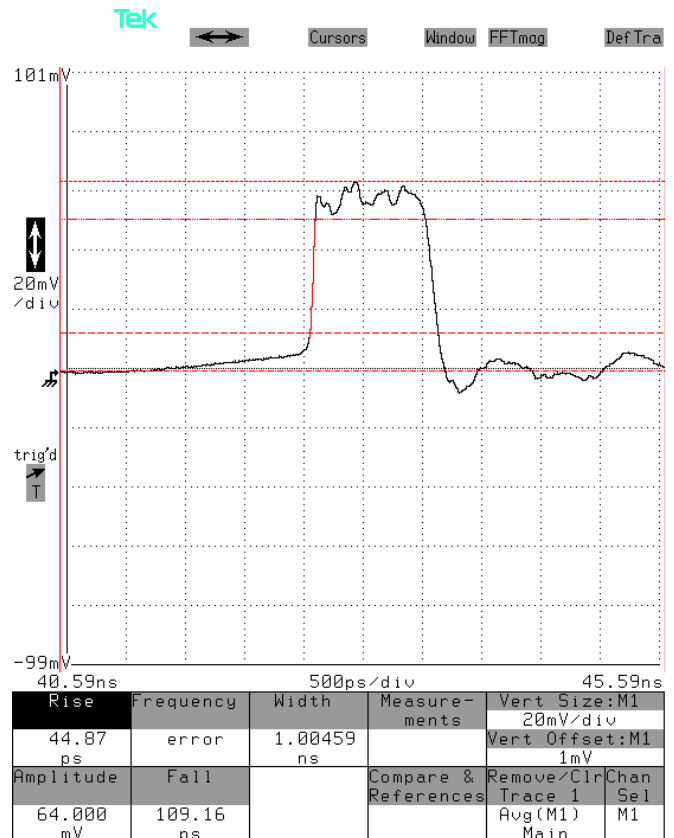


At 100 MHz and < 0.2 ns, > 5V:

200 ps/div. 2 V/div (20 mV × 40 dB):

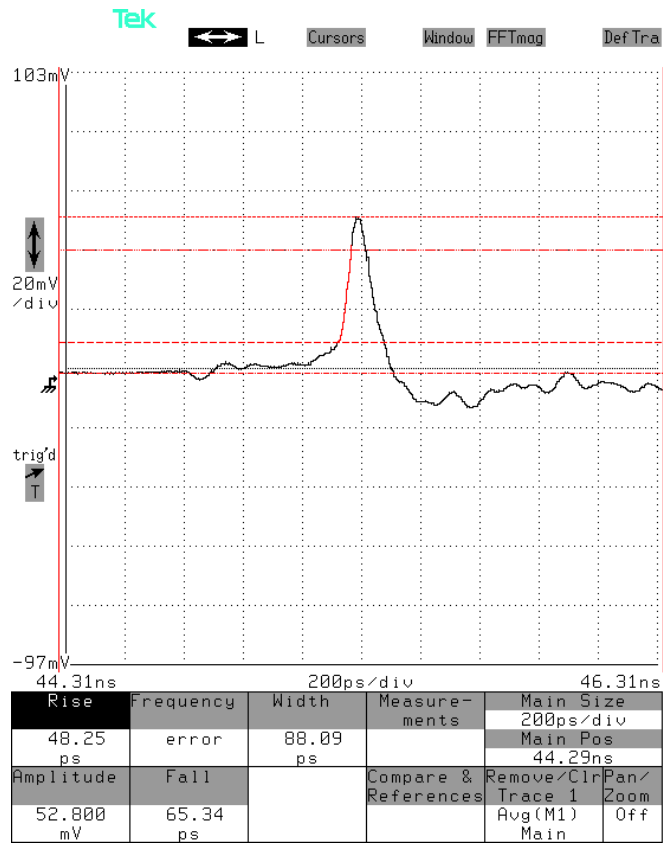


At 100 MHz and 1 ns, > 5V:

2 ns/div. 2 V/div (20 mV × 40 dB):

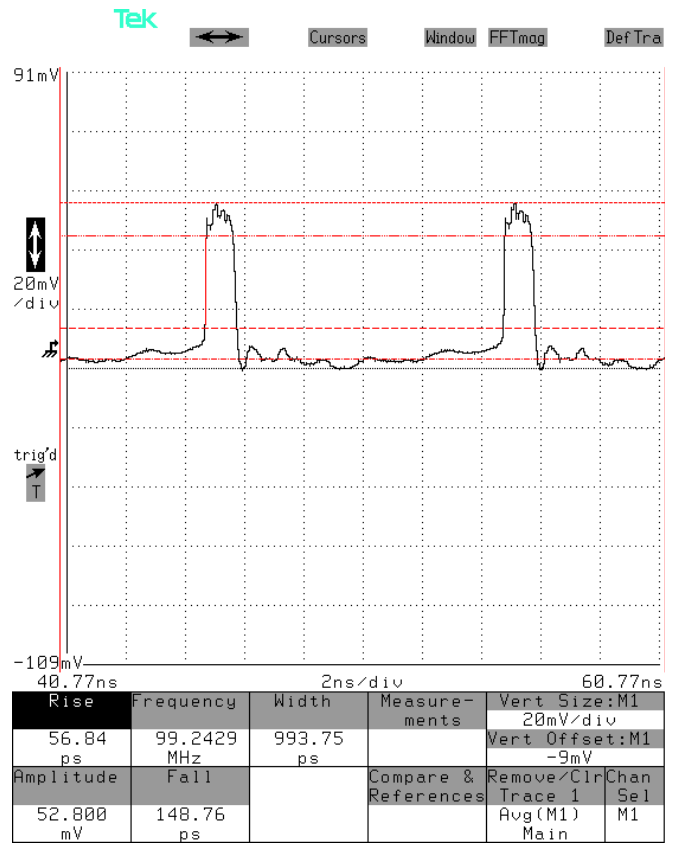

At 250 MHz and 0.2 ns, > 5V:

1 ns/div. 2 V/div (20 mV × 40 dB):

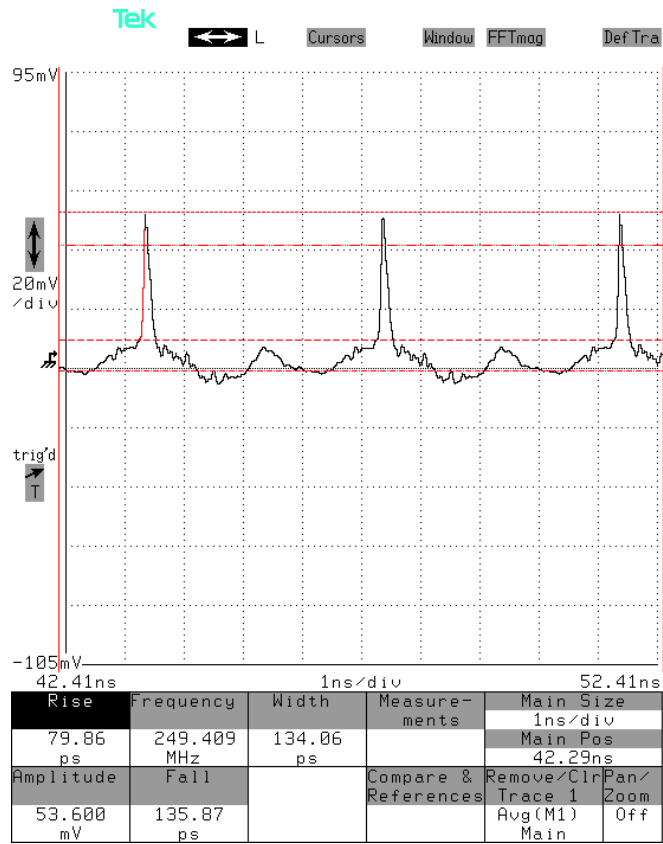

At 250 MHz and 0.6 ns, > 5V:

2 ns/div. 2 V/div (20 mV × 40 dB):

