



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-E2-C-P
Type: Ultra-High-Speed Pulse Generator
S.N.: 12375
Date: December 15, 2009

Output Amplitude: 0 to +50V, to 50Ω
Pulse Width (FWHM): 20 - 200 ns
Rise Time (20%-80%): ≤ 500 ps
Fall Time (80%-20%): ≤ 500 ps
PRF: 100 kHz maximum
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

Leading edge at 100 kHz, > 200 ns, +50V,

Trailing edge at 100 kHz, > 200 ns, +50V,


5 ns/div. 10 V/div (100 mV × 40 dB):

5 ns/div. 10 V/div (100 mV × 40 dB):

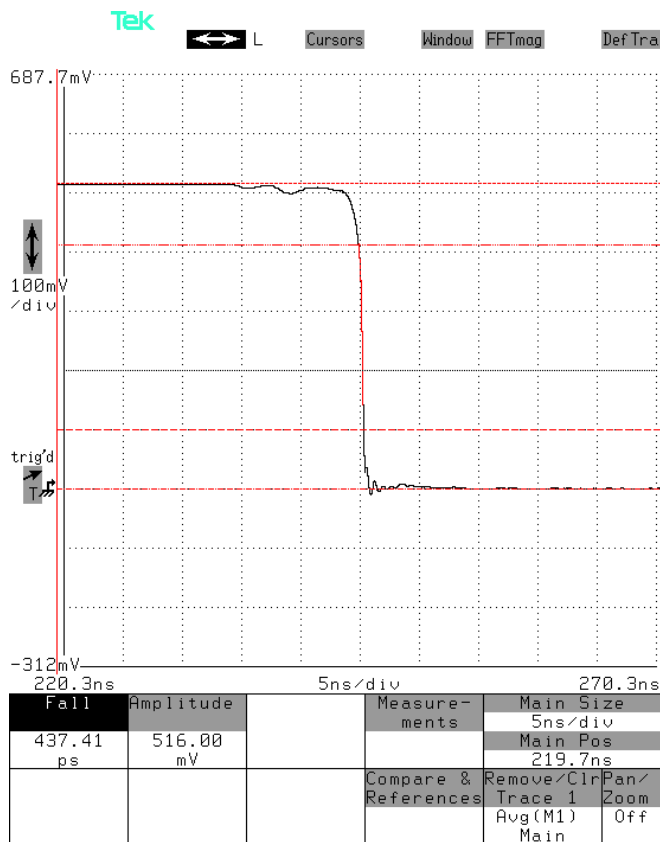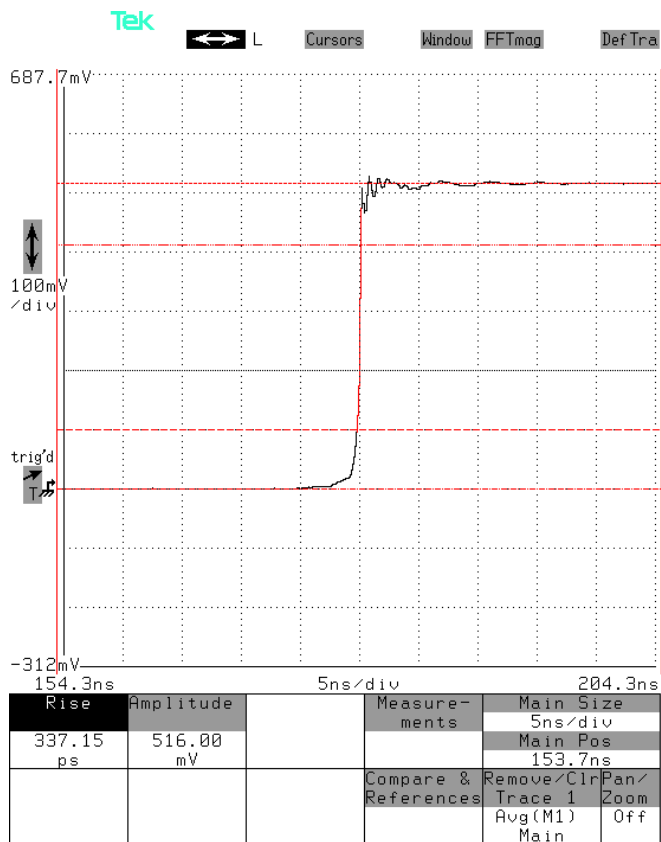

Full pulse at 100 kHz, > 200 ns, 50V,

50 ns/div. 10 V/div (100 mV × 40 dB):

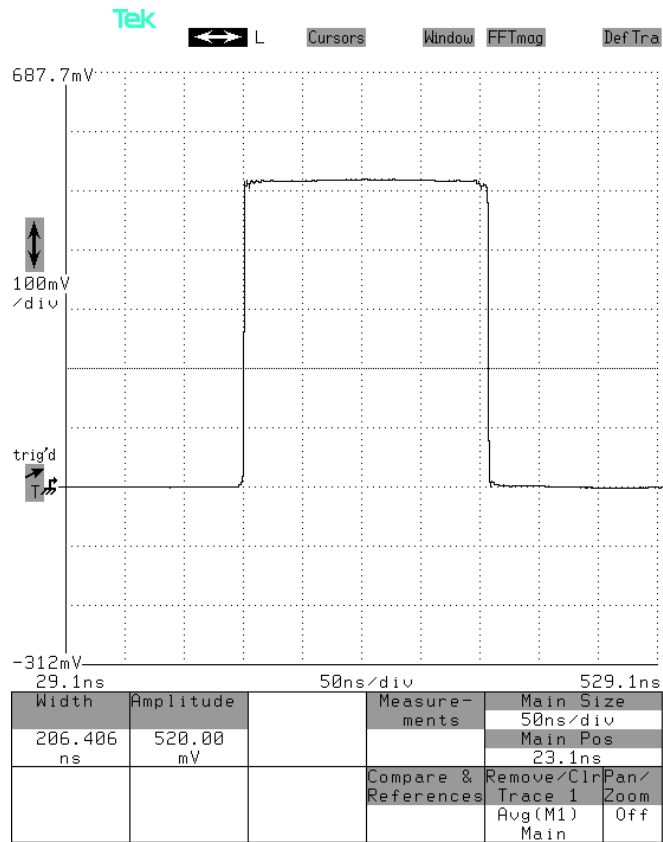

Full pulse at 100 kHz, < 20 ns, 50V,

5 ns/div. 10 V/div (100 mV × 40 dB):

