



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-9A-MTB-P1B-T1B-P  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 12528  
Date: November 9, 2011

Output Amplitude: +20 to 200 mA  
Pulse Width (FWHM): 0.4 – 4.0 ns  
Rise Time (20%-80%): ≤ 200 ps  
Fall Time (80%-20%): ≤ 200 ps  
PRF: 1 MHz maximum  
Jitter, Stability: OK  
Prime Power: +24V and -24V DC

Basic specifications: →



Test Waveforms

“MI” monitor output at maximum PW, maximum amplitude at 100 kHz, 0 Ohm DUT,

“MI” monitor output at minimum PW, maximum amplitude at 100 kHz, 0 Ohm DUT,

1 ns/div. 500 mV/div (50 mV × 20 dB):

1 ns/div. 500 mV/div (50 mV × 20 dB):

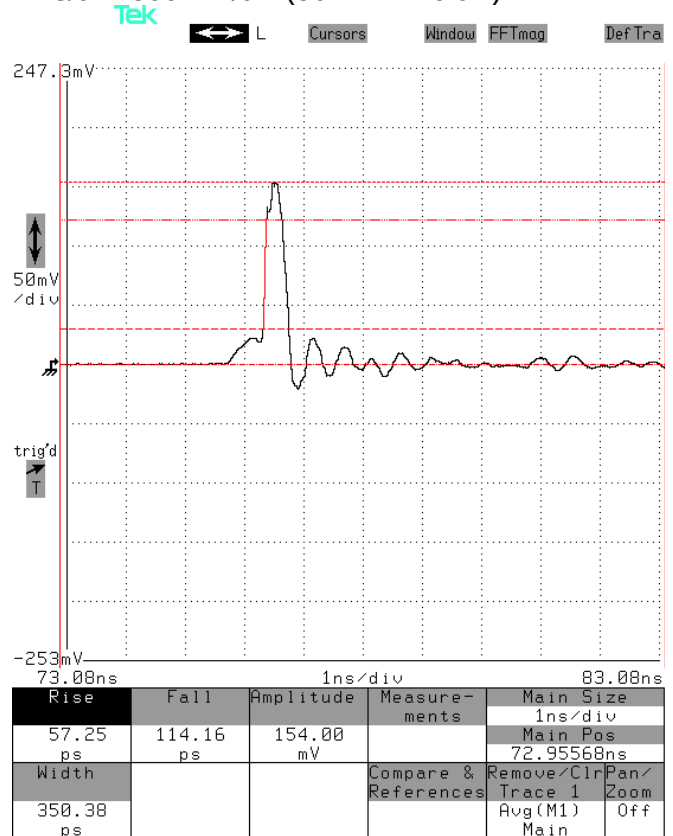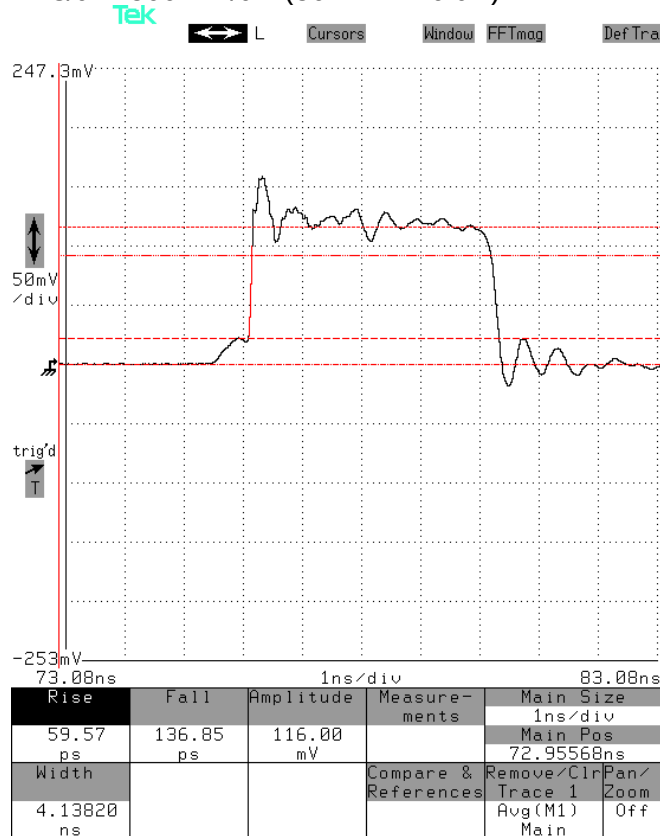

Note: The “spikes” on the rising and falling edges are measurement artifacts on the monitor output, rather than “real” signals.