



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-EB4-B-AC22-ANB  
Type: Semiconductor Device Tester  
S.N.: 12537  
Date: November 23, 2010



Output Amplitude: to +2A, -4A  
Pulse Width (FWHM): 2 – 20 us  
Switching Time,  
+ to -, 10%-90%: ≤ 4.5 ns  
PRF: 1 - 100 Hz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →

Test Waveforms

With an On Semi 1N4937 installed in the AVX-TRR-ANB test jig, connected using the 60 cm / 24" coaxial cable:

With a generic 1N4004 installed in the AVX-TRR-ANB test jig, connected using the 60 cm / 24" coaxial cable:

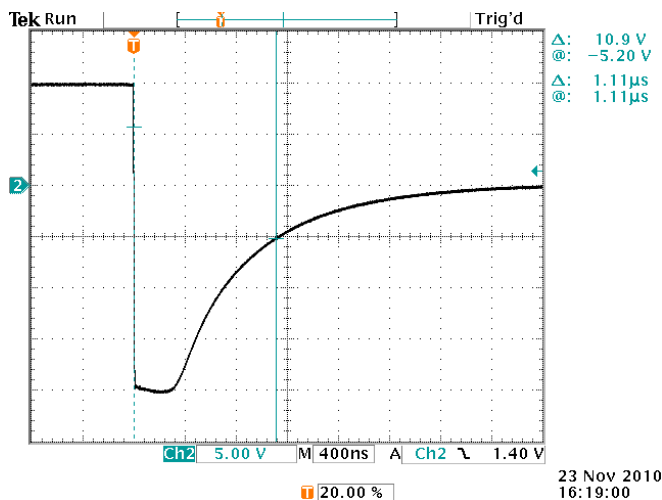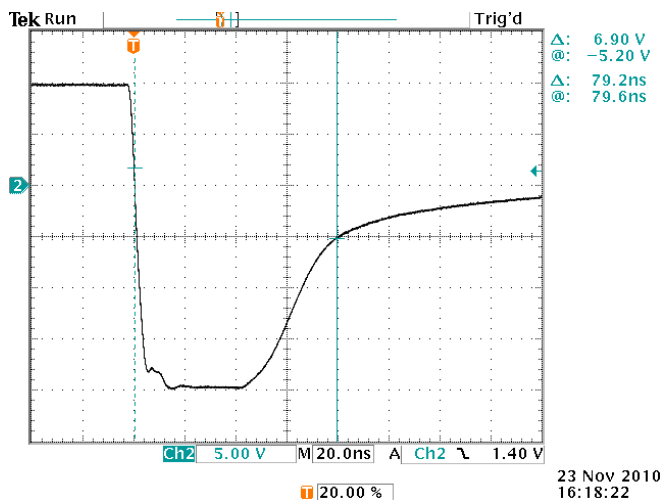

$I_F = +2A, I_R = -4A, I_{RR} = -1A.$

$I_F = +2A, I_R = -4A, I_{RR} = -1A.$

100 Hz, 20 us PW.

100 Hz, 20 us PW.


5V (1A) / div, 20 ns/div.

5V (1A) / div, 400 ns/div.

Measured  $t_{RR} = 79.2$  ns.

Measured  $t_{RR} = 1.11$  us.

Mainframe output, with a zero Ohm jumper installed in the AVX-TRR-ANB test jig

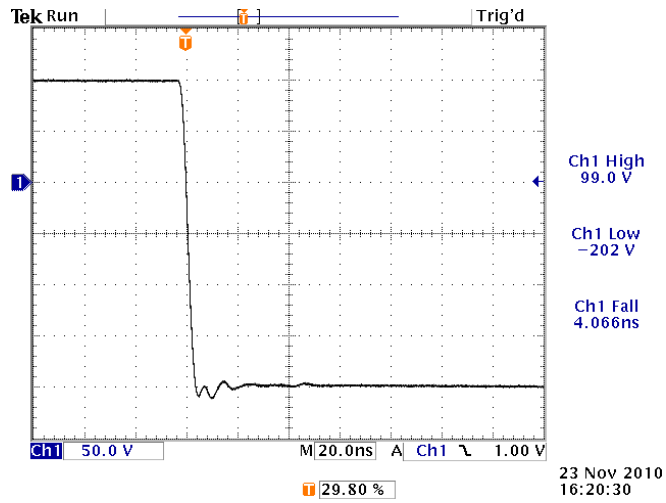

50 V / div, 20 ns/div. +100V, -200V.

10% - 90% fall time shown.