



# AVTECH ELECTROSYSTEMS LTD.

NANOSECOND WAVEFORM ELECTRONICS  
SINCE 1975

□ P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

☒ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

## PERFORMANCE CHECKSHEET

Model: AVM-2-P-M  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 12625  
Date: March 31, 2011

Output Amplitude: 0 to +15V  
Pulse Width (FWHM): 0.25 to 2 ns  
Rise Time (20%-80%): < 100 ps  
Fall Time (80%-20%): < 250 ps  
PRF: 3 kHz - 25 MHz  
Jitter, Stability: OK  
Prime Power: +24V, 500 mA DC

Basic specifications: →

### Test Waveforms

At 12 MHz, > 15V amplitude, < minimum pulse width.


At 12 MHz, > 15V amplitude, > maximum pulse width.

200 ps/div. 5 V/div (50 mV × 40 dB):

500 ps/div. 5 V/div (50 mV × 40 dB):



Width	Rise	Fall	Measurements	Main Size
126.49 ps	45.13 ps	115.50 ps		200ps/div
Amplitude			Compare & References	Main Pos
166.00 mV			Remove/Clr Trace 1	57.16896ns
			Avg(M1)	Off
			Main	

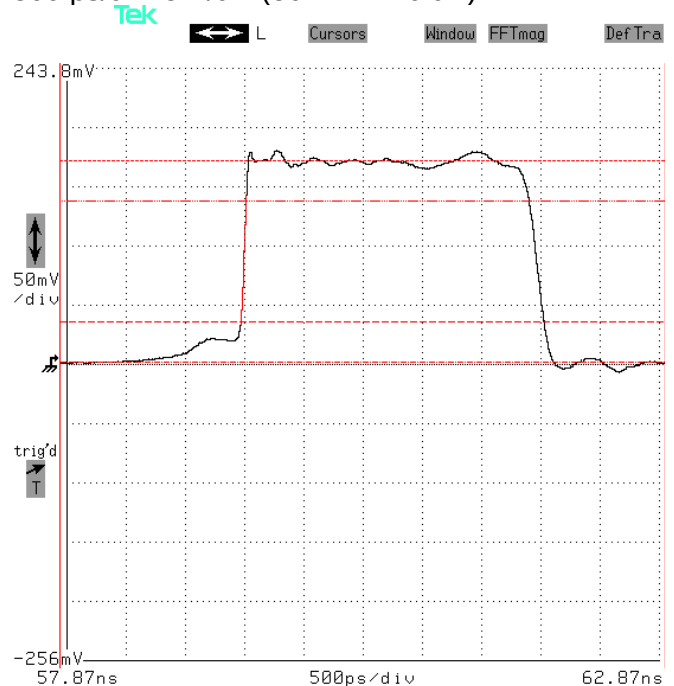

Width	Rise	Fall	Measurements	Main Size
2.47090 ns	47.11 ps	126.47 ps		500ps/div
Amplitude			Compare & References	Main Pos
170.00 mV			Remove/Clr Trace 1	57.80896ns
			Avg(M1)	Off
			Main	