



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVOZ-B3-B-P  
Type: High-Speed High-Current Pulsed-Voltage Laser Diode Driver  
S.N.: 12926  
Date: September 20, 2012

Rise / Fall Time Test

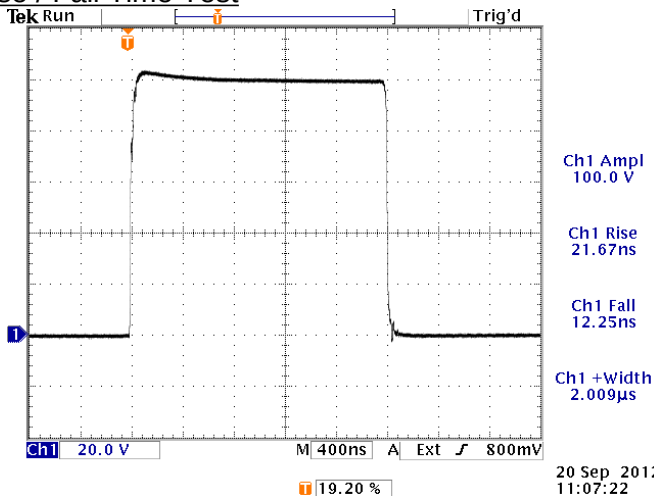

100 Hz, 2 µs, +100V into a 1Ω / 100W test load, using AV-CLZ1-60 cabling. 20 V/div, 400 ns/div

a) Output Signal Amplitude: 0 to +100V

b) Pulse Width (FWHM): 100 ns – 2 µs

c) Rise Time (20%-80%): < 30 ns


d) Fall Time (80%-20%): < 30 ns

e) PRF: 1 Hz - 10 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

Maximum Duty Cycle Test

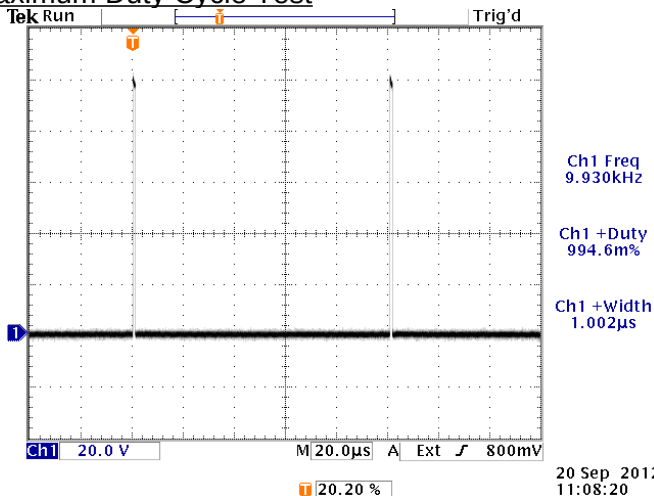

10 kHz, 1 µs, +100V into a 1Ω / 100W test load, using AV-CLZ1-60 cabling. 20 V/div, 20 µs/div

Reference levels: 20%, 80%.