



info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVR-E3-B-P-W3-OT-AK8-AC02  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 14281  
Date: October 7, 2022

Output Amplitude: up to +100V, to 50Ω  
Pulse Width (FWHM): 1 ns to 5 us  
Rise Time (20%-80%): ≤ 0.5 ns  
Fall Time (80%-20%): ≤ 1.5 ns  
PRF: 1 Hz - 100 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

10 kHz, < 1 ns, > +100V,

10 kHz, 15 ns, +100V,


2 ns/div. 50 V/div (50 mV/div × 60 dB):

5 ns/div. 50 V/div (50 mV/div × 60 dB):

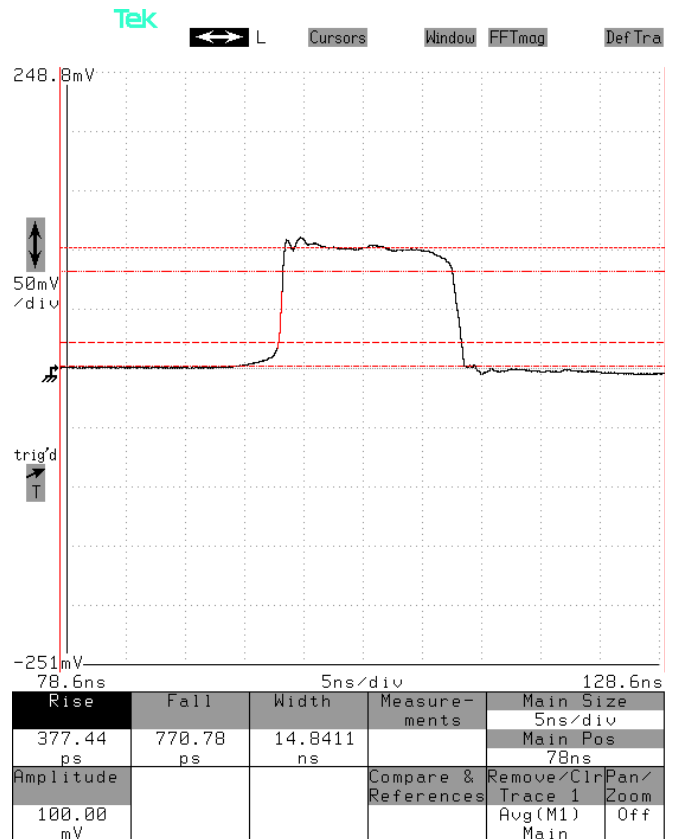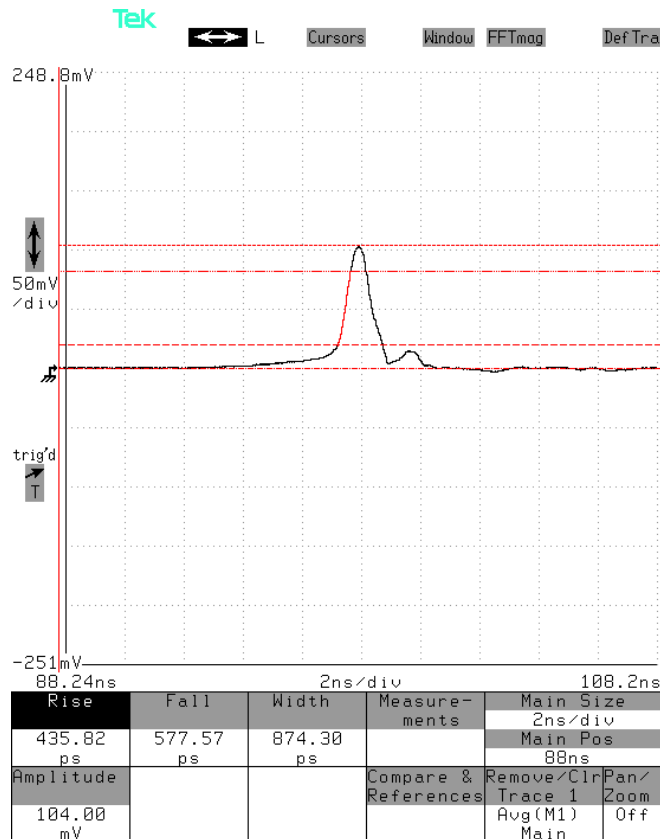


20 kHz, 100 ns, +100V, leading edge,

5 ns/div. 50 V/div (50 mV/div × 60 dB):

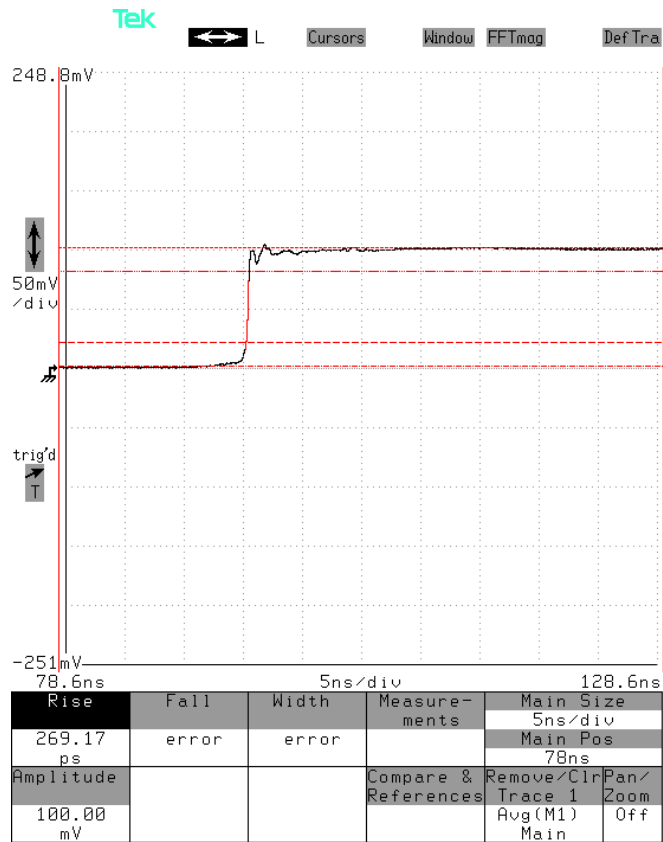


20 kHz, 100 ns, +100V, trailing edge,

5 ns/div. 50 V/div (50 mV/div × 60 dB):

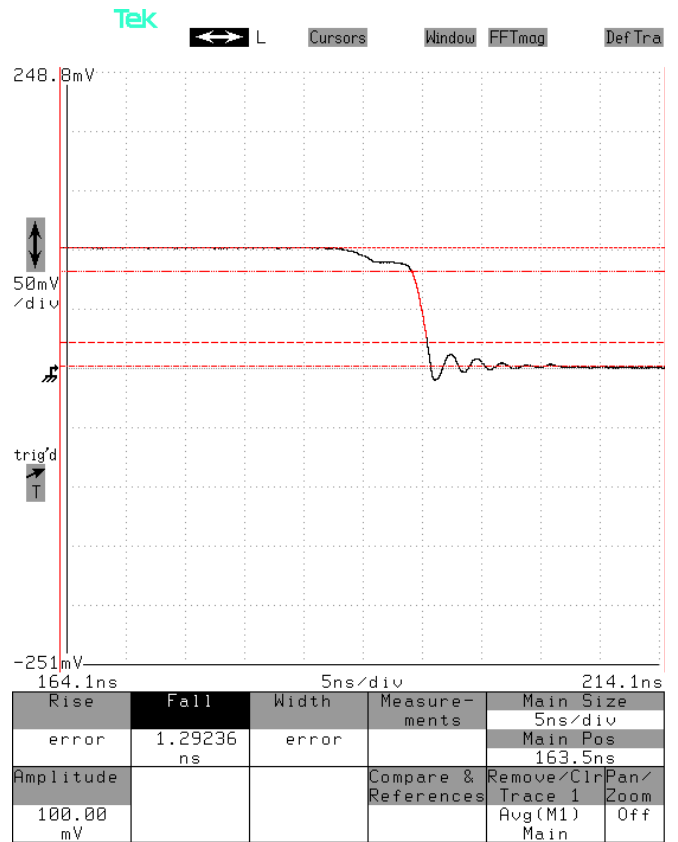

20 kHz, 100 ns, +100V, full pulse,

20 ns/div. 50 V/div (50 mV/div × 60 dB):

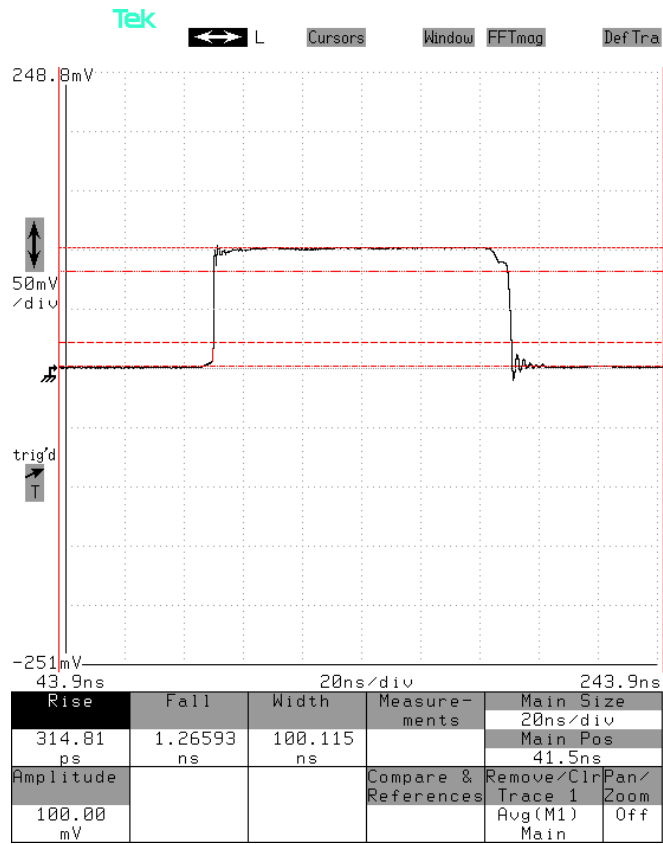

2 kHz, 5 us, +100V, full pulse,

1 us/div. 50 V/div (50 mV/div × 60 dB):

