

info@avtechpulse.com
http://www.avtechpulse.com/


Tel: 888-670-8729 (USA & Canada)
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AV-106B-B-AC03-R5-P-TP1A-SY1A
Type: Pulsed Constant Current Generator
S.N.: 14128
Date: June 1, 2021

Rise/Fall Time Test

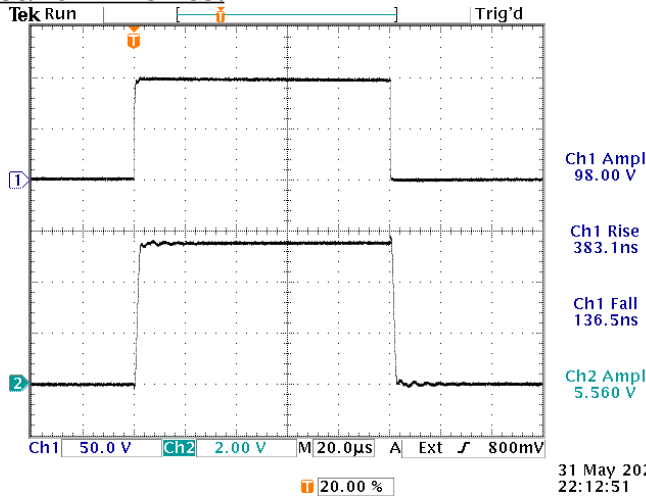

a) Output Signal Amplitude: up to +100 A

b) Pulse Width (FWHM): < 2 – 200 us

c) Rise Time (20%-80%): < 1 us

d) Fall Time (80%-20%): < 1 us


e) PRF: 1 Hz - 100 Hz

f) Jitter, Stability: OK

Top: +100A into the AV-CTL1-ENC load, using the AV-CLZ1-200 cable.
Bottom: Monitor output into open circuit

g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test

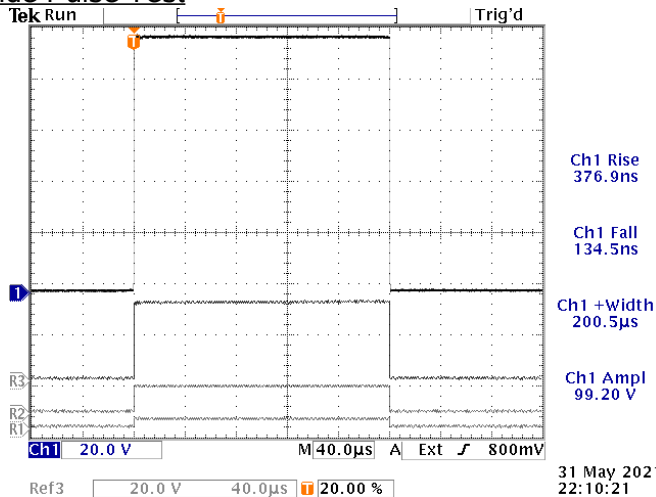

200 us, 5 Hz, into 0.986Ω directly on the rear panel.
3, 10, 30, & 100 Amps. 20 V/div, 40 us/div.

Reference levels: 20%, 80%.