



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET


Model: AV-156A-B-HC
Type: Pulsed Constant Current Generator
S.N.: 12031
Date: July 23, 2008

Rise Time Test

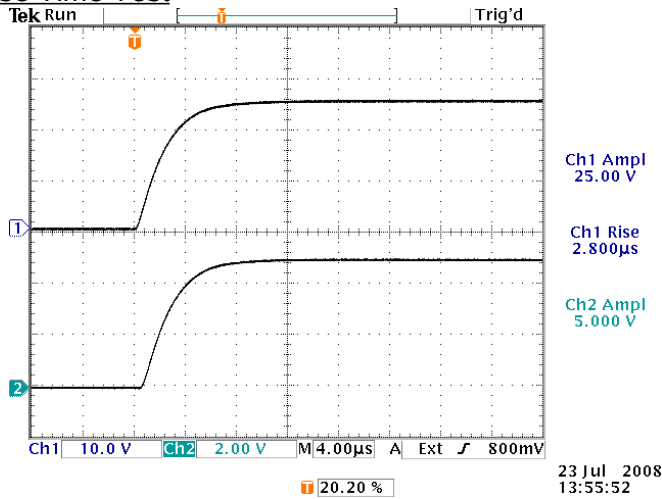

Top: OUT, +5A amplitude into 5.017 Ω, 10 ms PW,
20 Hz PRF, 10 V/div, 4 us/div
Bot: Monitor output into 10kΩ load, 2V/div, 4 us/div

Wide Pulse Test:

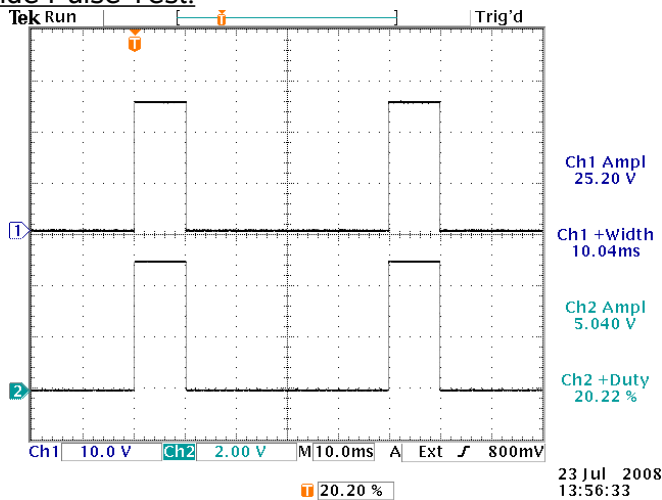

Top: OUT, +5A amplitude into 5.017 Ω, 10 ms PW,
20 Hz PRF, 10 V/div, 10 ms/div
Bot: Monitor output into 10kΩ load, 2V/div, 4 us/div

- a) Output Signal Amplitude: 0 - 5A
- b) Pulse Width (FWHM): 10 us - 10 ms
- c) Rise Time (20%-80%): < 4 us,
for $R_L < 5\Omega$
- d) Fall Time (80%-20%): < 4 us,
for $R_L < 5\Omega$
- e) PRF: 0.1 Hz - 10 kHz
- f) Jitter, Stability: OK
- g) Prime Power: 100 - 240V AC, 50 - 60 Hz.

References levels: 20%, 80%.