

P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (315) 883-1328

TEL: 1-800-265-6681  
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-1011-B-BR-R5-FSA  
S.N.: 11460  
Date: March 30, 2006

Minimum PW, Maximum PRF Test:

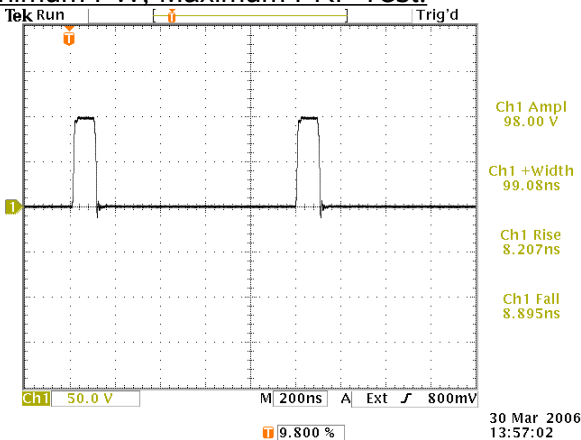


Output waveform (50V/div, 200 ns/div) for:  
PRF=1 MHz, PW=100 ns, AMPL=MAX,  
ZOUT=2Ω

Reference levels: 10%, 90%


- a) Output Signal Amplitude: 0 to ±100V  
( $R_{LOAD} \geq 50\Omega$ )
- b) Pulse Width (FWHM): 100 ns - 1 ms  
(10% max. duty cycle)
- c) Rise Time (20%-80%): ≤ 10 ns
- d) Fall Time (20%-80%): ≤ 10 ns
- e) PRF: 0 - 1 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

Wide Pulse Test:

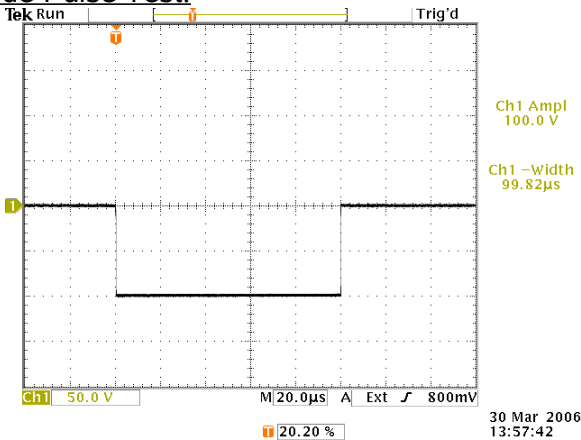

Output waveform (20V/div, 20 us/div) for:  
PRF=100 Hz, PW=100 us, AMPL=-100V,  
ZOUT=2Ω

Burst Mode Test:

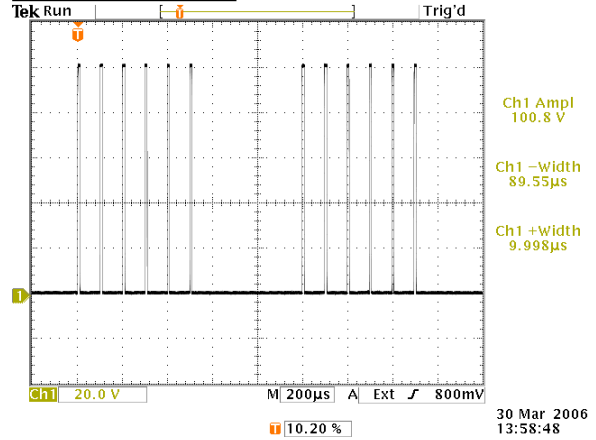

Output waveform (20V/div, 200 us/div) for:  
PRF=1 kHz, PW=10us, BUR=90us, N=6,  
AMPL=MAX, ZOUT=2Ω