


P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-1015-B
S.N.: 11238
Date: July 11, 2005

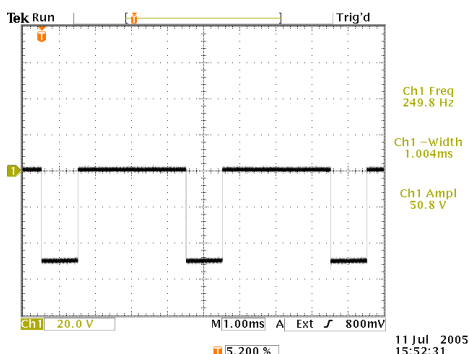


-50V, $Z_{OUT}=2\Omega$, 50 Ω load, PW = 1 ms, 250 Hz

a) Output Signal Amplitude: 0 to $\pm 50V$

b) Pulse Width: 20 ns - 10 ms,
25% duty cycle

c) Rise Time: $< 10\text{ ns}$

d) Fall Time: $< 10\text{ ns}$

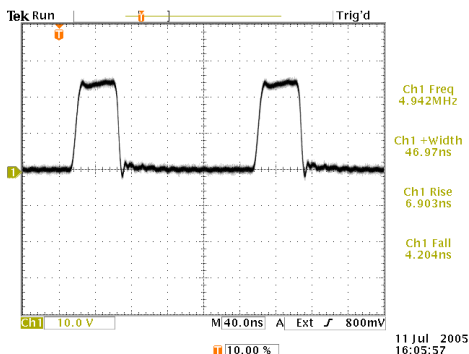


+50V, $Z_{OUT}=50\Omega$, 50 Ω load, PW = 50 ns, 5 MHz

e) PRF: 10 Hz - 10 MHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

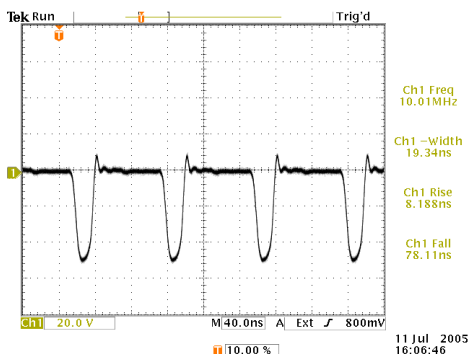

-50V, $Z_{OUT}=2\Omega$, 50 Ω load, near minimum PW, 10 MHz

Reference levels: 10%, 90%