

P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET


Model: AV-1021D-B
S.N.: 11003
Date: September 28, 2004

Channel 1 Test:

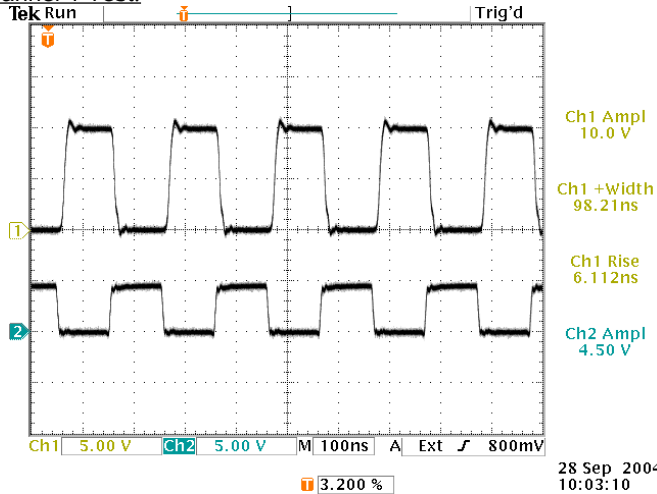

Top: OUT 1, +10V amplitude, 0V offset, into 50Ω
Bottom: Logic CH 1 complement, TTL, into 50Ω
Both: Frequency 5 MHz, 5V/div, 100 ns/div

Channel 2 Test:

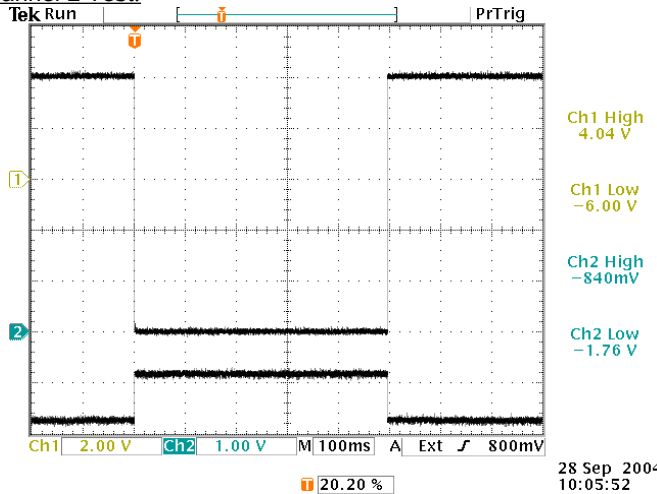

Top: OUT 2, -10V ampl., +4V offset, into 50Ω, 2V/div, 100 ms.
Bottom: Logic CH 2, ECL, into 50Ω, 1V/div
Both: Frequency 1 Hz, 100 ms/div

Reference levels: 20%, 80%.

- a) Output Signal Amplitude: 0 to ±10V
- b) Pulse Width (FWHM): 30 ns - 500 ms
- c) Rise Time (20%-80%): < 10 ns
- d) Fall Time (80%-20%): < 10 ns
- e) PRF: 1Hz - 10 MHz
- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.