



P.O. BOX 265 OGDENSBURG, NY U.S.A. 13669-0265 TEL: (315) 472-5270 FAX: (613) 226-2802

TEL: 1-800-265-6681 FAX: 1-800-561-1970


e-mail: info@avtechpulse.com http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE OTTAWA, ONTARIO CANADA K2C 3H4 TEL: (613) 226-5772 FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AVR-5B-B-PN-BR S.N.: 11111 Date: February 4, 2005


Rise & Fall Time Test

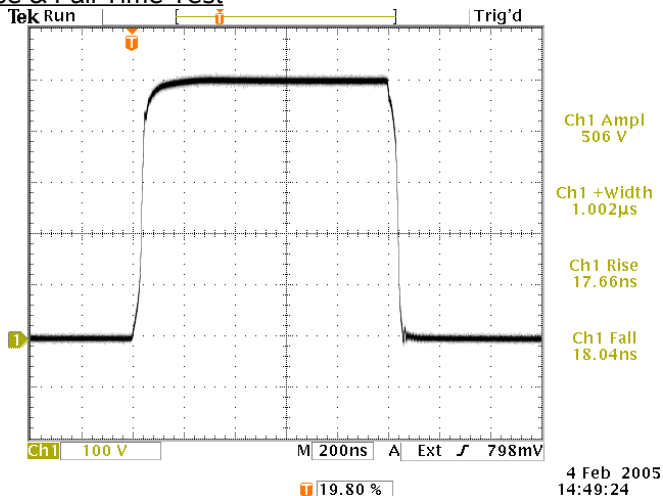

1 kHz, 1 us, +500V into a 50Ω load. 100 V/div, 200 ns/div.

- a) Output Signal Amplitude: 0 to ±500V b) Pulse Width (FWHM) : 100ns-100us, 1% maximum duty cycle c) Rise Time (20%-80%): < 30 ns d) Fall Time (80%-20%): < 20 ns e) PRF: 1 Hz - 10 kHz f) Jitter, Stability: OK

Wide Pulse Test

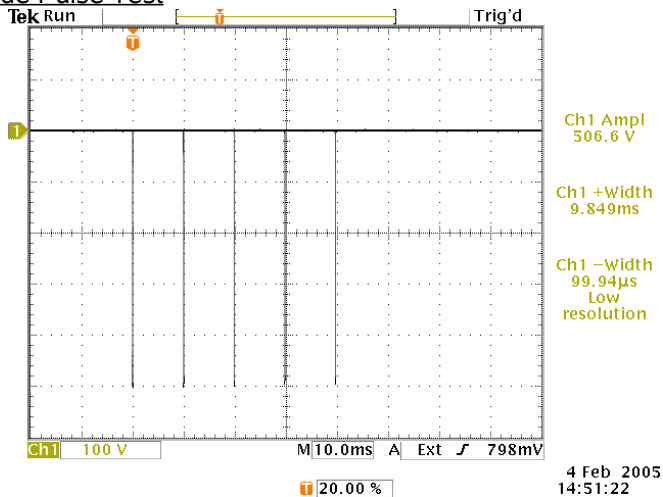

10 Hz burst rate, five 100 us pulses per burst, 9.9 ms burst spacing. -500V into a 50Ω load. 100 V/div, 10 ms/div.

- g) Prime Power: 100-240V AC, 50-60 Hz.

References levels: 20%, 80%.