



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-E3-B-P-W3-AK2-AK8-R5-X4
Type: Ultra-High-Speed Pulse Generator
S.N.: 13258
Date: April 7, 2015

Output Amplitude: up to +100V, to 50Ω
Pulse Width (FWHM): 1 ns to 5 us
Rise Time (20%-80%): ≤ 500 ps
Fall Time (80%-20%): ≤ 1 ns
PRF: 1 Hz - 20 kHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

20 kHz, 4 ns, +100V,

20 kHz, 30 ns, +100V,


2 ns/div. 50 V/div (50 mV/div × 60 dB):

5 ns/div. 50 V/div (50 mV/div × 60 dB):

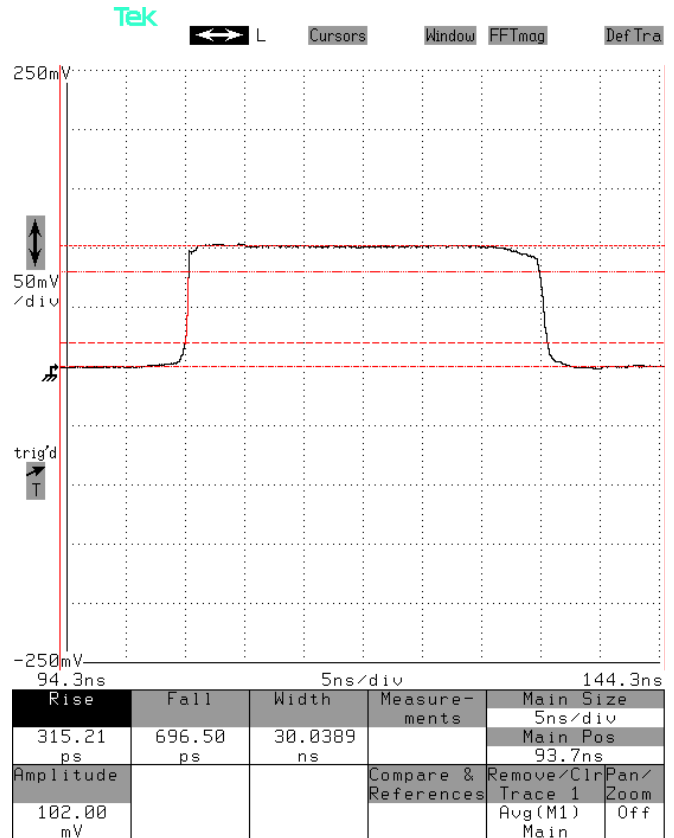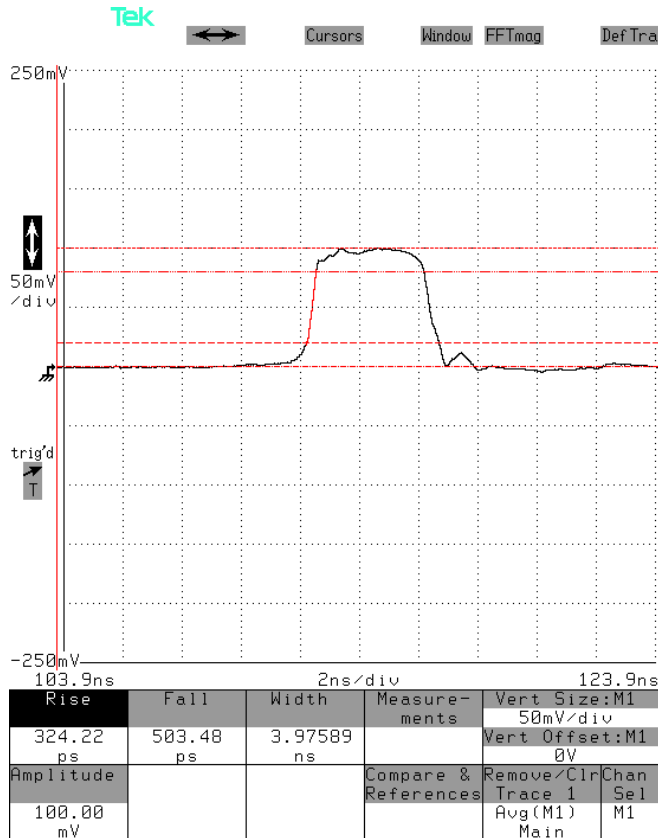


10 kHz, 5 us, +100V,

1 us/div. 50 V/div (50 mV/div × 60 dB):

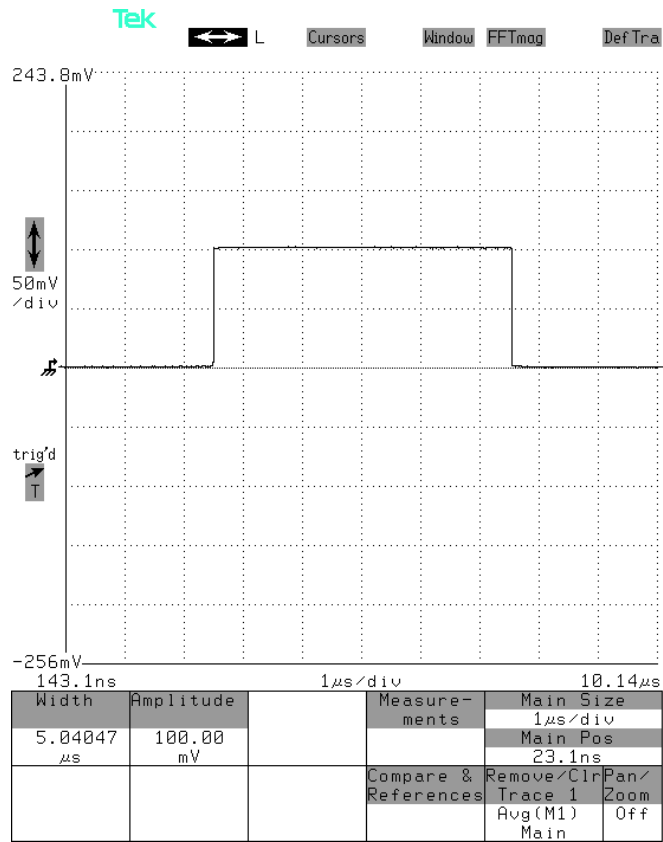

20 kHz, 2 us, +100V, rising edge shown,

10 ns/div. 50 V/div (50 mV/div × 60 dB):

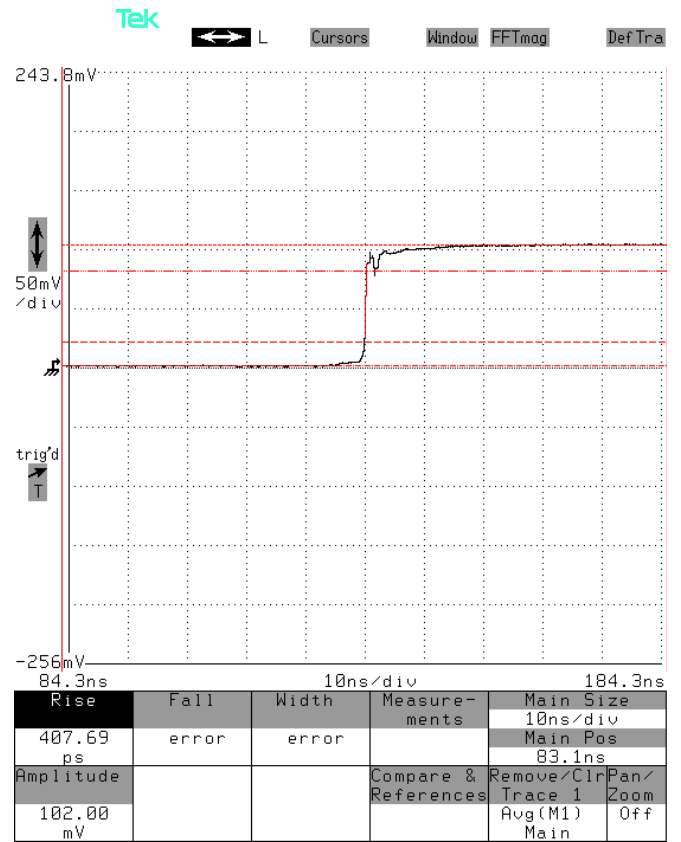

20 kHz, 2 us, +100V, falling edge shown,

5ns/div. 50 V/div (50 mV/div × 60 dB):

