



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)  
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVR-E3-B-PN-W1-OT13-ATT-AK2-AC02  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 13424  
Date: April 28, 2016

Output Amplitude: up to 100V, to 50Ω  
Pulse Width (FWHM): 1 to 200 ns  
Rise Time (20%-80%): ≤ 500 ps  
Fall Time (80%-20%): ≤ 1 ns  
PRF: 1 Hz - 100 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

100 kHz, 5 ns, > +100V,

100 kHz, 10 ns, > -100V,


2 ns/div. 50 V/div (50 mV/div × 60 dB):

2 ns/div. 50 V/div (50 mV/div × 60 dB):

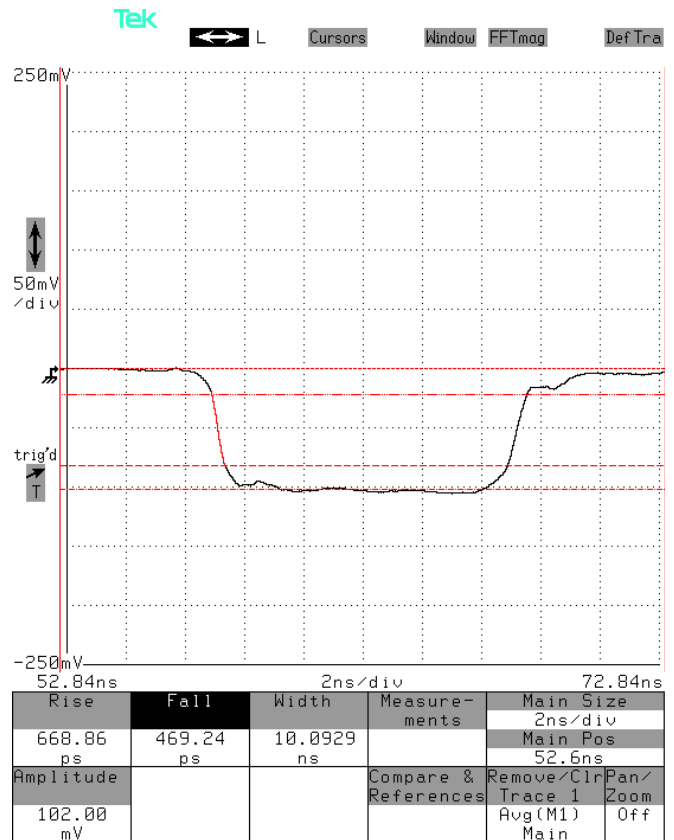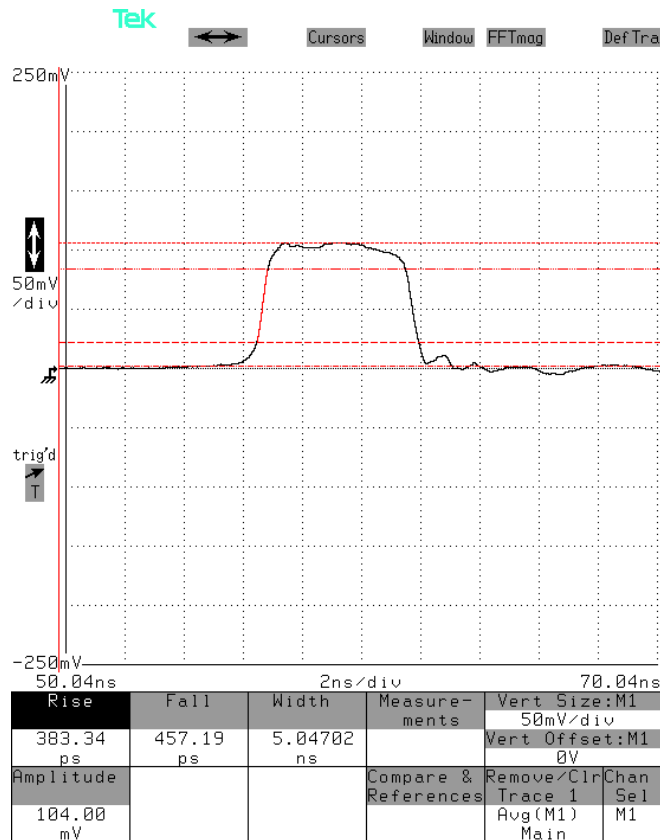


100 kHz, 30 ns, > +100V,

5 ns/div. 50 V/div (50 mV/div × 60 dB):

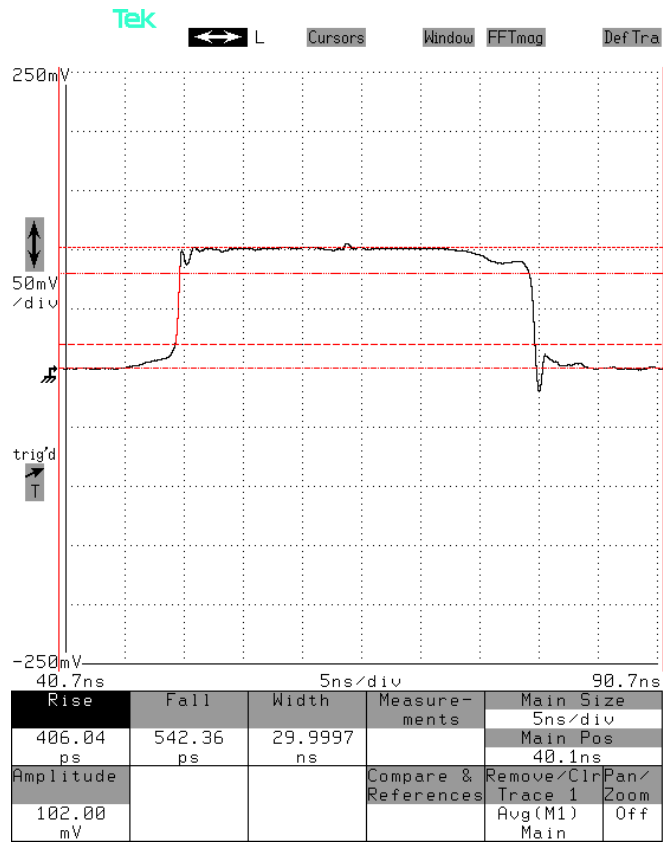

10 kHz, 200 ns, > -100V, leading edge,

5 ns/div. 50 V/div (50 mV/div × 60 dB):

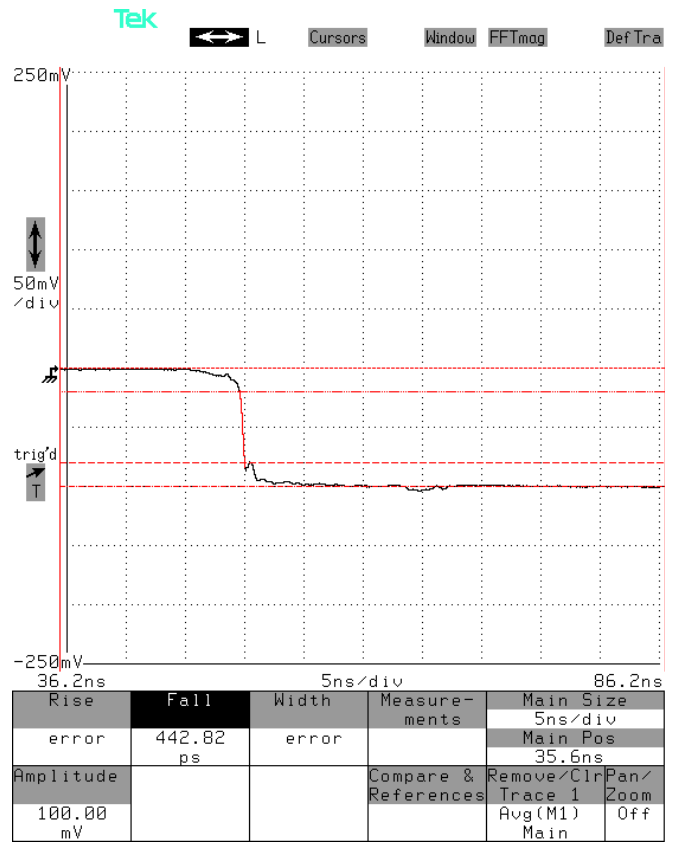

10 kHz, 200 ns, > -100V, trailing edge,

5 ns/div. 50 V/div (50 mV/div × 60 dB):

