

info@avtechpulse.com  
http://www.avtechpulse.com/

Tel: 888-670-8729 (USA & Canada)  
or +1-613-686-6675 (Worldwide)

BOX 5120, LCD MERIVALE  
OTTAWA, CANADA K2C3H5

PERFORMANCE CHECKSHEET

Model: AVR-E3-B-PN-W3-AK2-X1-AC00  
Type: Ultra-High-Speed Pulse Generator  
S.N.: 14218  
Date: March 23, 2022

Output Amplitude: up to ±100V, to 50Ω  
Pulse Width (FWHM): 1 ns to 5 us  
Rise Time (20%-80%): ≤ 0.5 ns  
Fall Time (80%-20%): ≤ 1.5 ns  
PRF: 1 Hz - 100 kHz  
Jitter, Stability: OK  
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

100 kHz, < 1 ns, > +100V,

10 kHz, 10 ns, -100V,


2 ns/div. 50 V/div (50 mV/div × 60 dB):

2 ns/div. 50 V/div (50 mV/div × 60 dB):

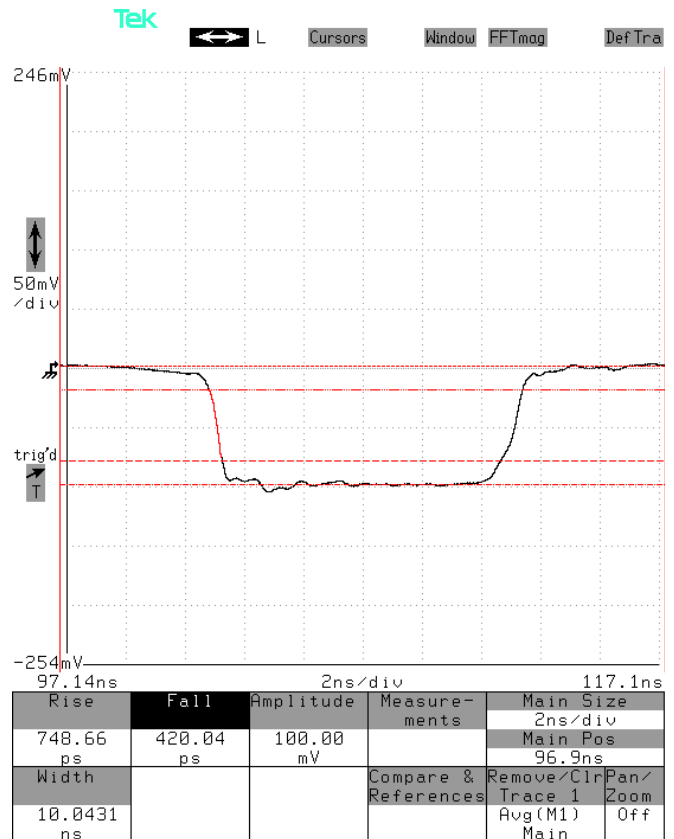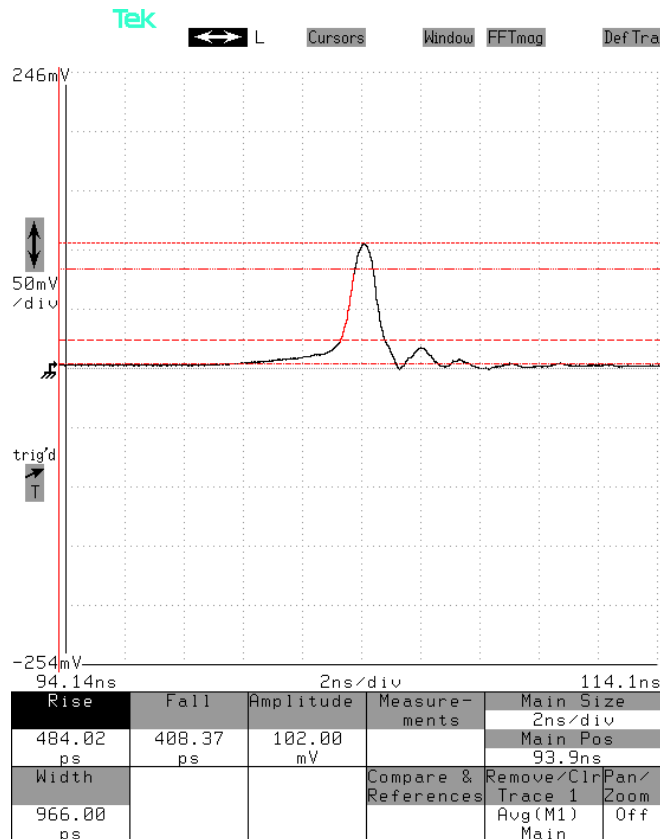


20 kHz, 100 ns,  $\geq +100V$ , leading edge,

5 ns/div. 50 V/div (50 mV/div  $\times$  60 dB):

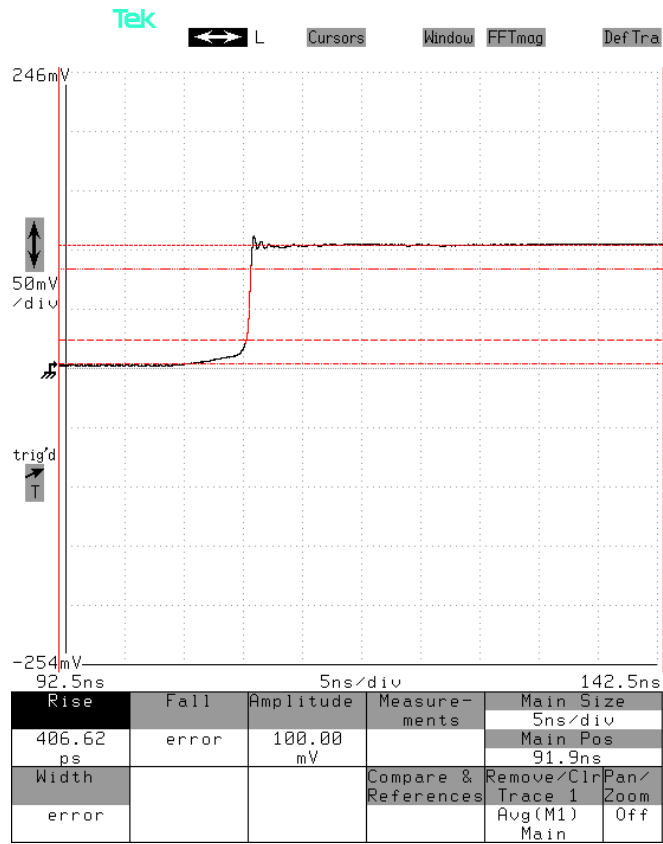


20 kHz, 100 ns,  $\geq +100V$ , trailing edge,

5 ns/div. 50 V/div (50 mV/div  $\times$  60 dB):

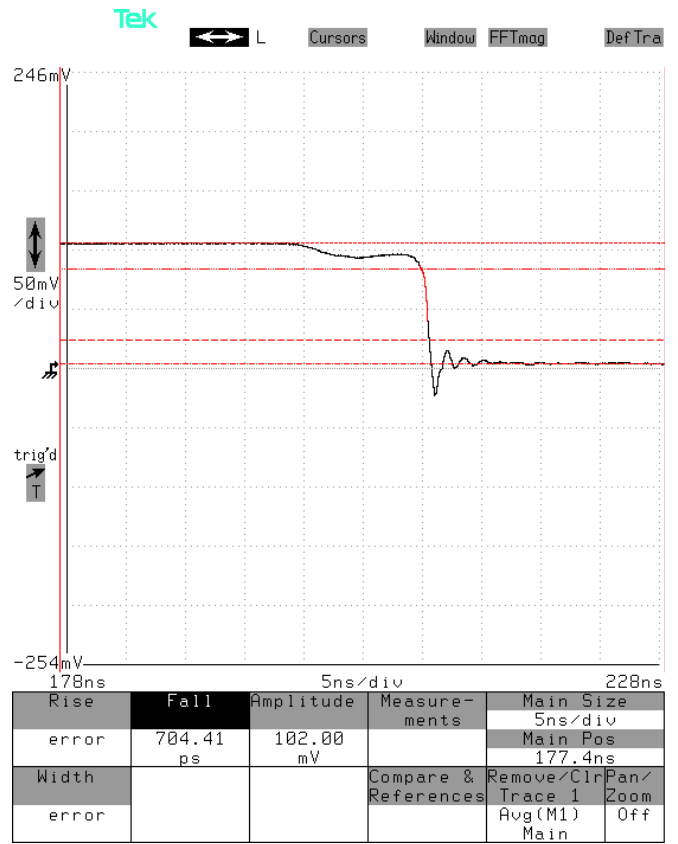

5 kHz, 5 us, +100V, leading edge,

5 ns/div. 50 V/div (50 mV/div × 60 dB):

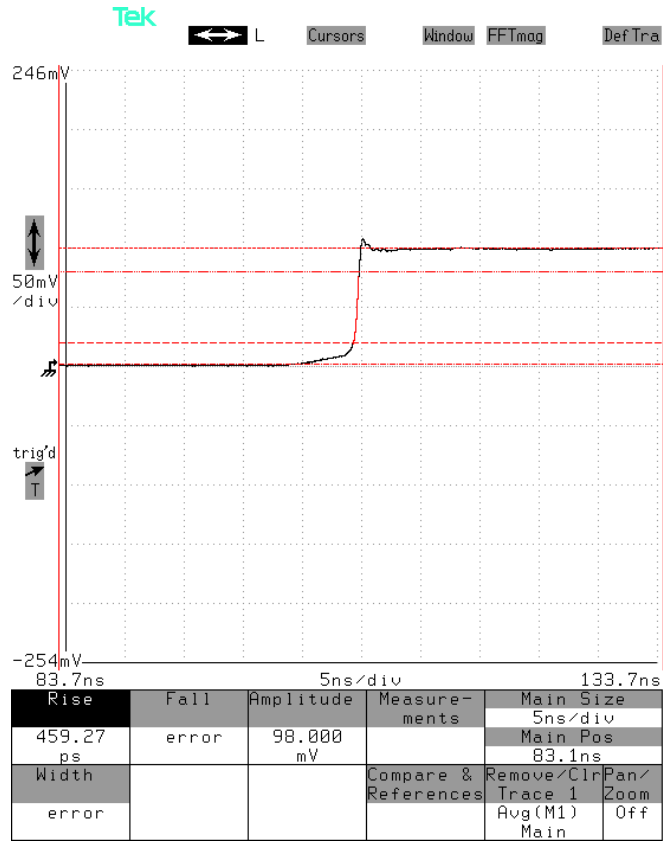

5 kHz, 5 us, -100V, full pulse,

1 us/div. 50 V/div (50 mV/div × 60 dB):

