


PULSE GENERATOR

PERFORMANCE CHECK

Model: *AMP-AV-TTL-P-PS-EW*

S.N.: *1198*

Date: *FEB 28 83*

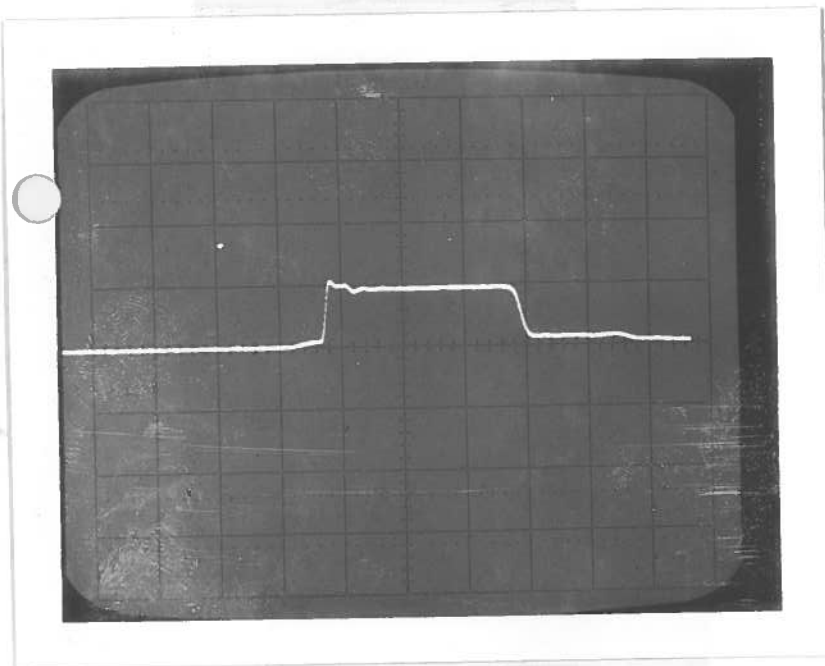

*10 VOLTS/DIV
100 NSEC/DIV
400 KHz.*

a) Output signal amplitude:

0 TO +10V

b) Pulse width:

0 TO 4 nsec

c) Rise time:

≤ 100 psec

d) Fall time:

≤ 135 psec

e) PRF:

0 TO 1 MHz

f) Jitter, stability:

OK

g) Prime power:

120/240 V,

50 - 60 Hz.

*UNIT SHIPPED
WITH VOLTAGE SELECTOR
CARD IN THE
240 V POSITION.*

[Signature]