


PULSE GENERATOR
PERFORMANCE CHECK

Model: *PR-133-C-4141*

S.N.: *2178*

Date: *JAN 14 85*

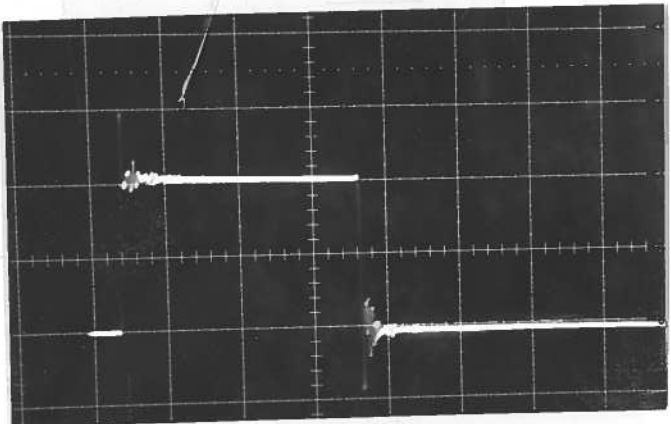

- a) Output signal amplitude:
0 TO +100 V TO
- b) Pulse width: *R_L ≥ 10 K*
0.1 TO 1.0 USEC
- c) Rise time:
≤ 5 NSEC
- d) Fall time:
≤ 5 NSEC
- e) PRF:
0 TO 100 KHz
- f) Jitter, stability:
OK
- g) Prime power:

50 VOLTS/DIV
0.2 USEC/DIV
100 KHz
R_L = 10K


120 / 240 V
50 - 60 Hz
[Signature]

PULSE GENERATOR
PERFORMANCE CHECK


Model: *APR-B3-C-4H1*

S.N.: *2170*

Date: *FEB 10 1988*

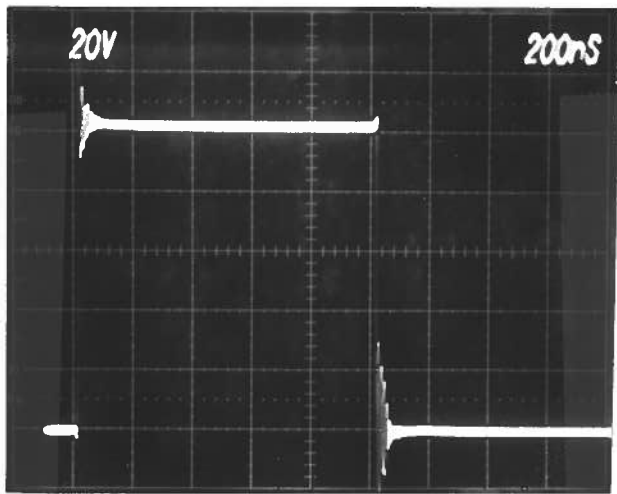

Ⓐ $R_L = 10K$
 $PRF = 100 KHz$

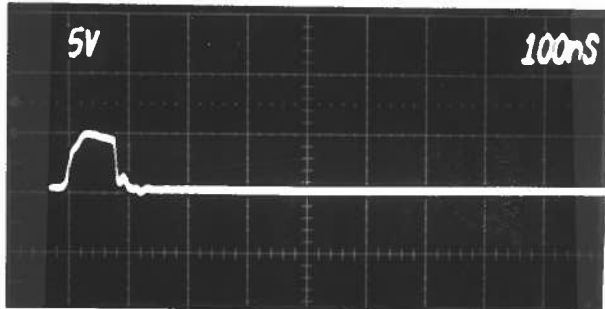

Ⓑ *sync out*
(to 50 Ω)

- a) Output signal amplitude:
0 to 100V to $R_L \geq 10K$
- b) Pulse width:
0.1 to 1.0 μ sec.
- c) Rise time:
 ≤ 5 nsec
- d) Fall time:
 ≤ 5 nsec
- e) PRF:
0 to 100 KHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240V
50-60 Hz