


PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVMK-2-C-7N*
S.N.: *2739*
Date: *FEB 10 86*

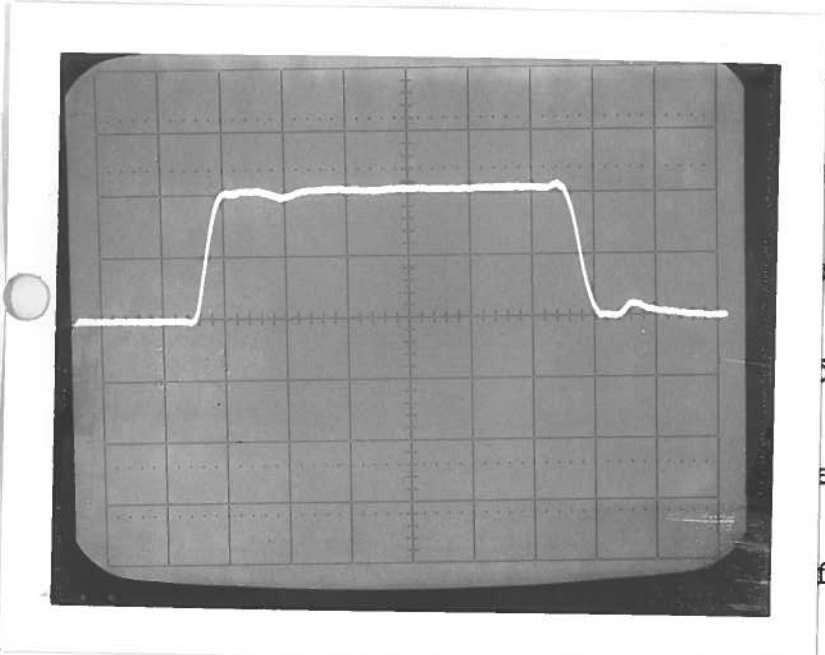

- d) Output signal amplitude:
0 TO ± 20 VOLTS
- e) Pulse width:
20 TO 200 NSEC
(MAX DUTY CYCLE 20%)
- f) Rise time:
≤ 3 NSEC
- g) Fall time:
≤ 3 NSEC
- h) PRF:
0 TO 10 MHz
(MAX DUTY CYCLE 20%)
- i) Jitter, stability:
OK
- j) Prime power:

10 VOLTS/DIV
10 NSEC/DIV
100 MHz


120/240 V
50-60 Hz

PULSE GENERATOR
PERFORMANCE CHECK


Model: *AVMGR-2-C-PW-TXF*

S.N.: *2739*

Date: *NOV 5 86*

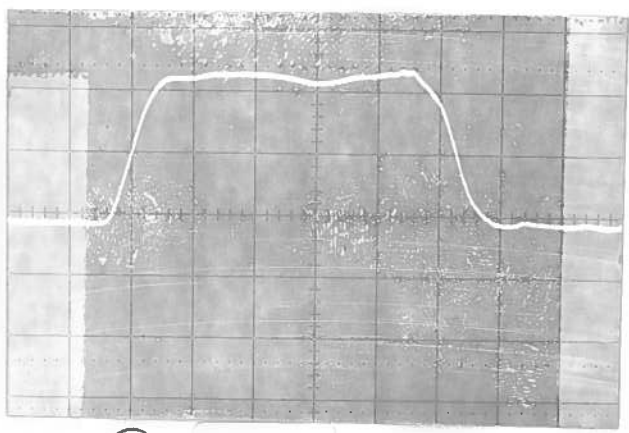

Ⓐ *5.0 nSEC/div*
10 VOLT/div
1.0 MHz
TR-TF HIGH

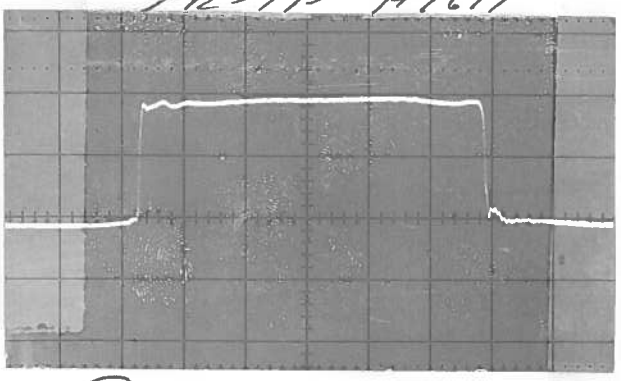

Ⓑ *AS Ⓐ BUT*
TR-TF LOW

- a) Output signal amplitude:
0 TO +20 VOLTS
- b) Pulse width:
20 TO 200 nSEC.
- c) Rise time:
0.3 OR 3.0 nSEC
- d) Fall time:
0.3 OR 3.0 nSEC
- e) PRF:
0 TO 5.0 MHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240 V
50-60 Hz