



PULSE GENERATOR
PERFORMANCE CHECK

Model: AVMAR-2-P-TRF

S.N.: 3048

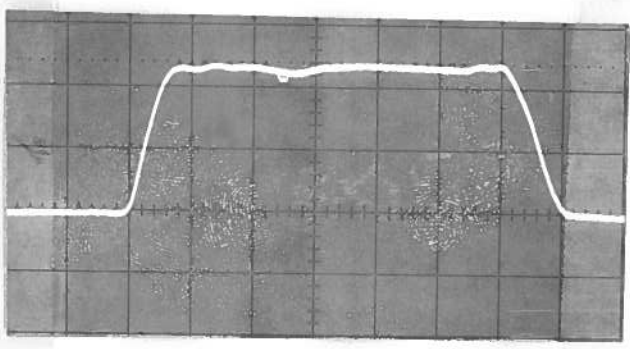

H 10 VOLTS/DIV
5 NSEC/DIV
500 KHz

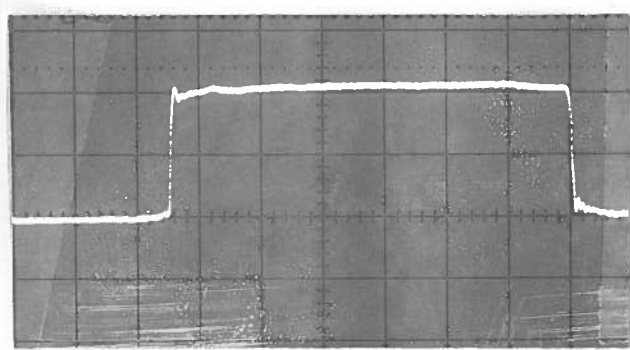

L 10 VOLTS/DIV
5 NSEC/DIV
500 KHz

- a) Output signal amplitude:
0 TO +20 VOLTS
- b) Pulse width:
20 TO 200 NSEC
- c) Rise time: (20% TO 90% AMPL. DIFF. CYCLES)
300 PSEC OR 3 NSEC
- d) Fall time:
300 PSEC OR 3 NSEC
- e) PRF:
14 } 0 TO 10 MHz
2 } 0 TO 5 MHz
- f) Jitter, stability:
OK
- g) Prime power:

+24 ± 1.0 VOLTS
400 mA (MAX)

[Signature]