



PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVL-2A-C-P-M-T-W*
 S.N.: *3352*
 Date: *SEPT 15 '86*

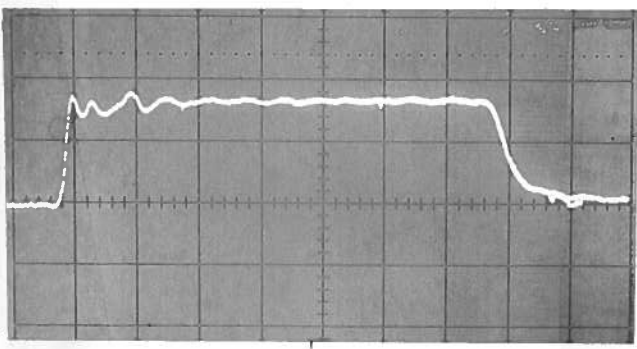

Ⓐ 100 VOLTS/DIV
10 NS/2 DIV
(MIN TR)

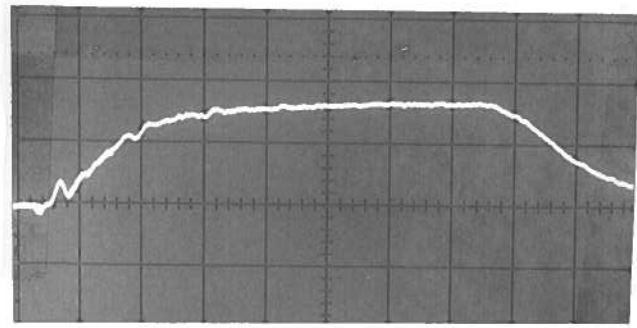

Ⓑ AS Ⓐ BUT
MIN TR

- a) Output signal amplitude:
0 TO +170 VOLTS
- b) Pulse width:
3 TO 400 NS *
- c) Rise time:
≤ 1 NS TO
10 NS
- d) Fall time:
≤ 3 NS TO
10 NS
- e) PRF:
0 TO 5 KHz
- f) Jitter, stability:
OK
- g) Prime power:
120/240 V
50-60 Hz

* NEEDS EXTERNAL
CABLE TO COVER
100 TO 400 NS
RANGE.