


PULSE GENERATOR
PERFORMANCE CHECK


Model: *ANNA-2-PS-TRF-PN-OT-M*

S.N.: *3907*


Date: *OCT 13 1987*

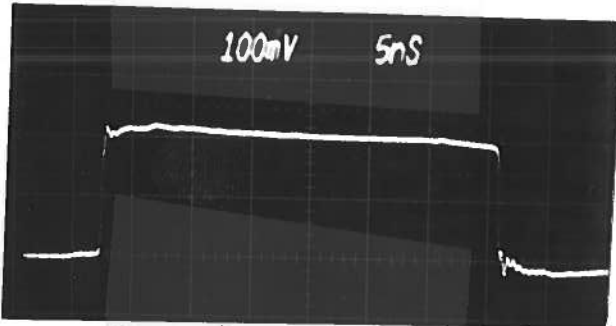

*(A) 40 dB ATTN
10 VOLTS/DIV
500 KHz TR, TF Low*

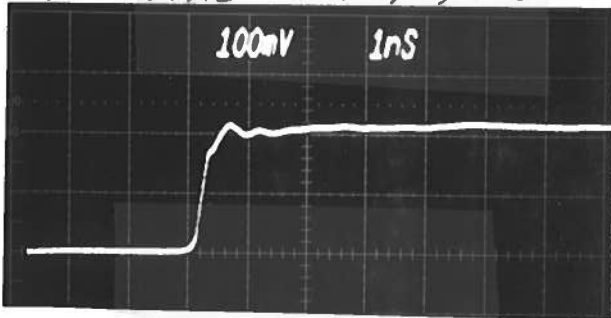

*(B) AS (A) BUT 1 nSEC/DIV
(TR Low)*

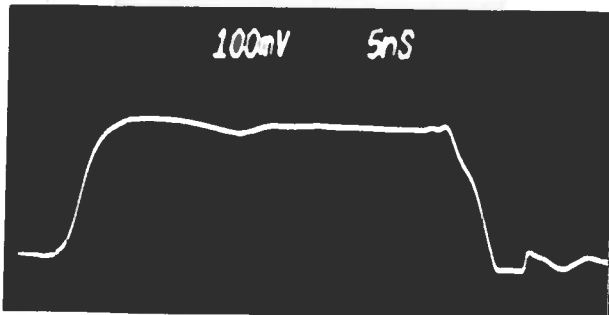

(C) AS (A) BUT TR, TF HIGH.

- a) Output signal amplitude:
0 TO ±20 VOLTS.
- b) Pulse width:
*20 TO 200 NSEC
(20% MAX DUTY CYCLE)*
- c) Rise time:
0.3 OR 3.0 NSEC.
- d) Fall time:
0.3 OR 3 NSEC.
- e) PRF:
*0 TO 5 MHz (Low TR, TF)
0 TO 10 MHz (HIGH TR, TF)*
- f) Jitter, stability:
OK
- g) Prime power:

*120/240V
50-60 Hz.*

[Signature]