


PULSE GENERATOR

PERFORMANCE CHECK

Model: *AVO-2W-PS-P-A*

S.N.: *4081*

Date: *JAN 29 1988*

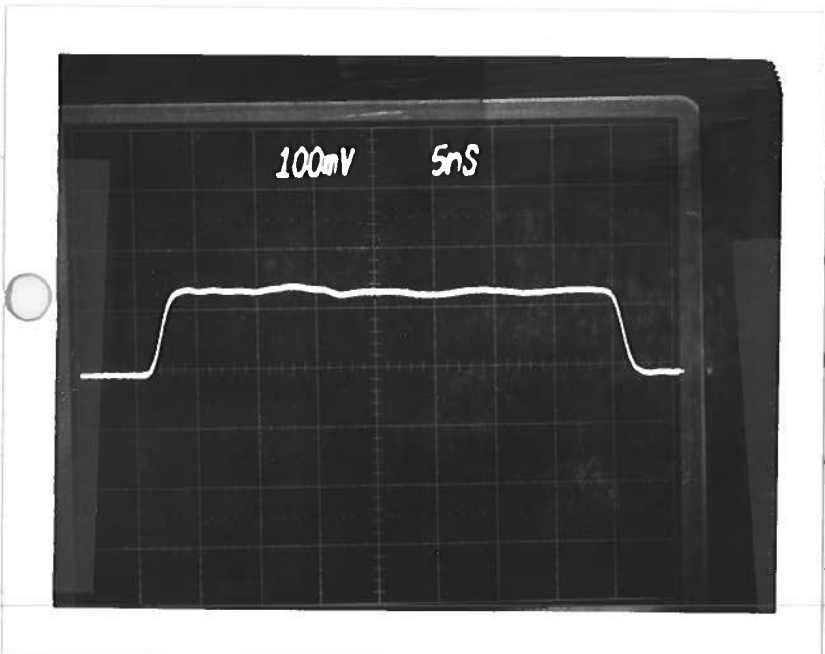

- a) Output signal amplitude:
0 TO +10 AMPS
- b) Pulse width:
2 TO 50 NS
- c) Rise time:
≤ 1 NS
- d) Fall time:
≤ 2 NS
- e) PRF:
0 TO 20 KHz
- f) Jitter, stability:
OK
- g) Prime power:


*≈ 6 AMPS/DIV
20 KHz*

*120 / 240V
50 - 60 Hz*

[Signature]

PULSE GENERATOR
PERFORMANCE CHECK

Model: *AVO-2W-PS-P-CA*
 S.N.: *4081 (REPAIR)*
 Date: *DEC 19 89*

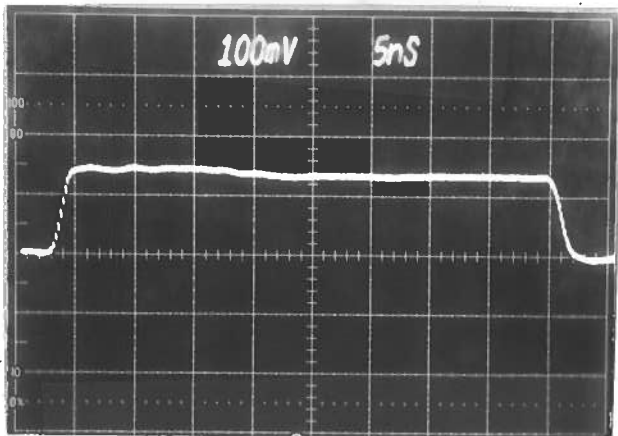

- a) Output signal amplitude:
0 TO +10 AMP
- b) Pulse width: *TO 5 μ*
3 TO 50 nSEC
- c) Rise time:
 ≤ 2 nSEC
- d) Fall time:
 ≤ 1 nSEC
- e) PRF:
0 TO 20 KHZ
- f) Jitter, stability:
OK
- g) Prime power:

R_i = 5 Ω
PRF = 10 KHZ

120/240V
50-60Hz

