


PULSE GENERATOR

PERFORMANCE CHECK


Model: *ANMR-1-1-CA-EW-ED-TRF-ECL-MN*

S.N.: *4248*

Date: *APRIL 12 1988*

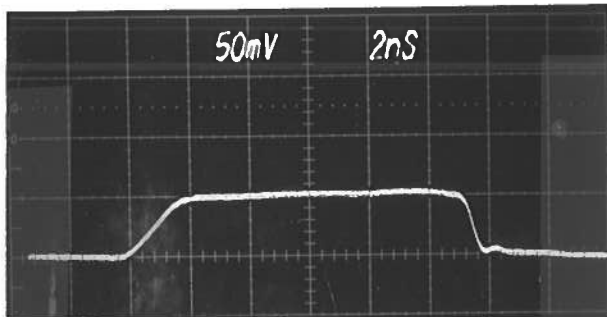

① 40 dB ATTEN  
5 VOLTS/DIV  
~ 7 MHz  
TR TF HIGH

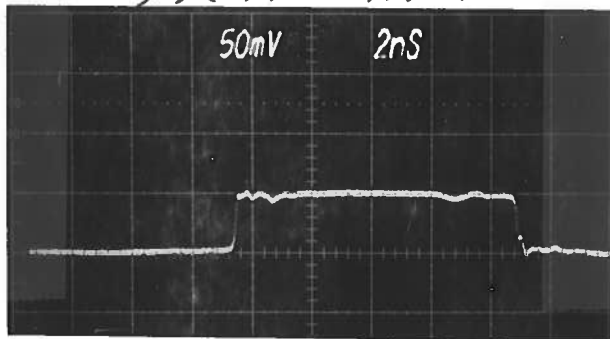

② 40 dB ATTEN  
5 VOLTS/DIV  
~ 7 MHz  
TR, TF LOW

a) Output signal amplitude:

*0 TO +5V*

b) Pulse width:

*5 TO 50 nSEC.  
(DUTY CYCLE MAX 20%)*

c) Rise time:

*0.1 OR 1.0 nSEC.*

d) Fall time:

*0.1 OR 1.0 nSEC.*

e) PRF:

*0 TO 10 MHz  
(MAX DUTY CYCLE 20%)*

f) Jitter, stability:

*OK*

g) Prime power:

*+24 ± 1.0 VOLT  
300 mA (MAX)*

h) OFFSET

*0 TO ±5 VOLT  
TO 50 nS*