


PULSE GENERATOR
PERFORMANCE CHECK

Model: *ANMR-2-C TRF P*

S.N.: *9027*


Date: *OCT 4 1999*

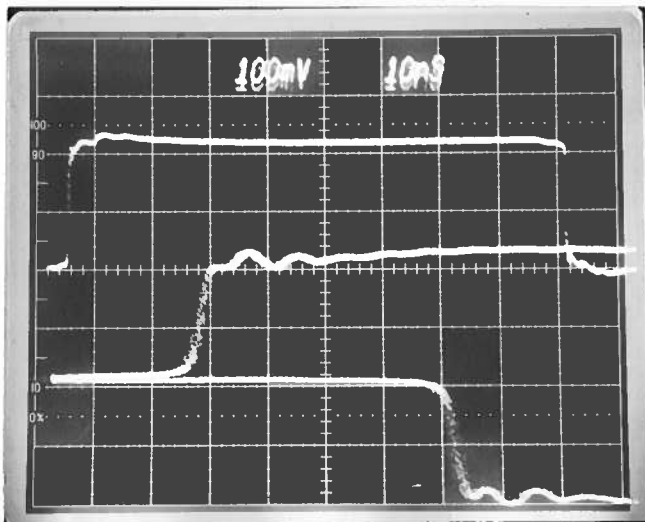

- a) Output signal amplitude:
0 TO +20 VOLTS (50%)
- b) Pulse width:
20 TO 200 NS
- c) Rise time: *(20% MAX DUTY CYCLE)*
≤ 300 ps or 3.0 NS
- d) Fall time:
≤ 300 ps or 3.0 NS
- e) PRF: *0 TO 10 MHz*
(20% MAX DUTY CYCLE)
- f) Jitter, stability:
OK

Ⓐ *40 dB ATTEN. - 10 V/DIV*
TRF - 10 NS/DIV
WID: 500ps/DIV (RISE TIME)
BOT: 500ps/DIV (FALL TIME)

Prime power: *x*, *100 VOLTS ± 10%*
50 - 60 MHz
A

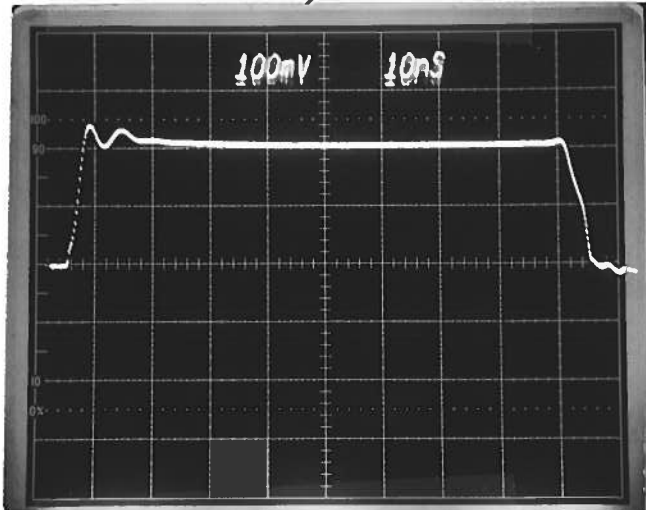

Ⓑ *40 dB ATTEN. - 10 V/DIV*
TRF, TRF HIGH