



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (613) 226-2802

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-110G-PS-D
S.N.: 11022
Date: October 20, 2004

Rise and Fall Time Test

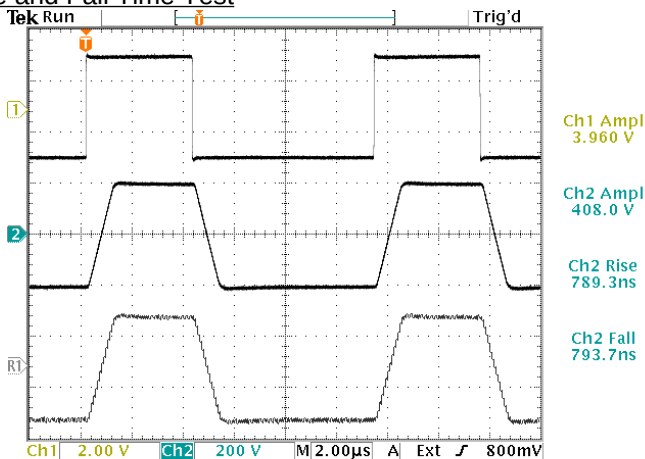

a) Output Signal Amplitude: 0 to ±200V,
to R ≥ 50 kΩ

b) Gain: ×1 to ×100

c) Rise Time: < 1 us


d) Fall Time: < 1 us

e) Bandwidth: 350 kHz

20 Oct 2004 13:38:10
Ref1 200 V 2.00 μs 11.00 %
Top: ±2V input (connected to IN A and IN B). 2V/div, 2 us/div.
Middle: OUT A (±200V) into a 50 kΩ load. 200V/div, 2 us/div.
Bottom: OUT B (±200V) into a 50 kΩ load. 200V/div, 2 us/div.

f) Jitter, Stability: OK

Arbitrary Input Test

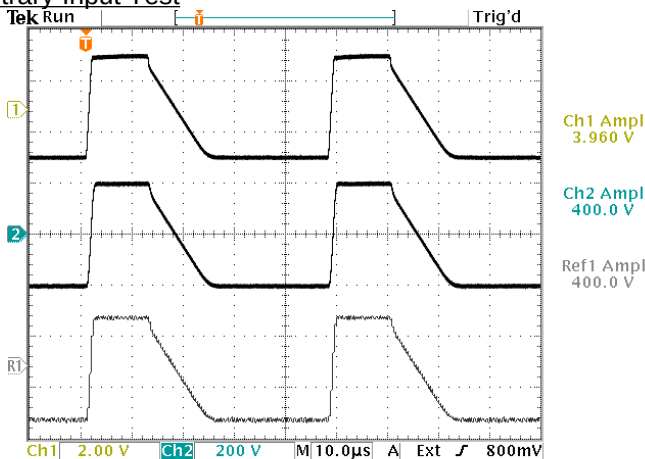

g) Prime Power: 100-240V AC, 50-60 Hz.

20 Oct 2004 13:42:30
Ref1 200 V 10.0 μs 11.00 %
Top: ±2V input (connected to IN A and IN B). 2V/div, 10 us/div.
Middle: OUT A (±200V) into a 50 kΩ load. 200V/div, 10 us/div.
Bottom: OUT B (±200V) into a 50 kΩ load. 200V/div, 10 us/div.

References levels: 10%, 90%.