



P.O. BOX 265
 OGDENSBURG, NY
 U.S.A. 13669-0265
 TEL: (315) 472-5270
 FAX: (613) 226-2802

TEL: 1-800-265-6681
 FAX: 1-800-561-1970

e-mail: info@avtechpulse.com
 http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
 OTTAWA, ONTARIO
 CANADA K2C 3H4
 TEL: (613) 226-5772
 FAX: (613) 226-2802

PERFORMANCE CHECKSHEET


Model: *AVN-4-CT*

S.N.: *11070*

Date: *JAN 17 2005*



40 dB ATTN: ∴ 10 VOLTS/DIV
 TOP: 2 NS/DIV (2 100 MHz)
 MID: AS TOP BUT 500ps/DIV
 BOT: 200 ps/DIV (100 MHz)

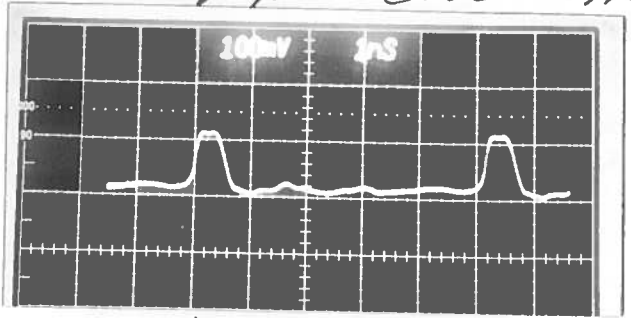

10 V/DIV
 PRF = 200 MHz

- a) Output Signal Amplitude:
 50-100 MHz: 0 TO +2.0V (TO 50ps)
 150 MHz: 0 TO +15V (TO 50ps)
 250 MHz: 0 TO +5V (TO 50ps)

b) Pulse Width:
0.3 TO 1.0 NS

c) Rise Time (20%-80%):
≤ 150ps

d) Fall Time (80%-20%):
≤ 150ps

e) PRF: *50 TO 250 MHz*

f) Jitter, Stability: *OK*

g) Prime Power:
100-240 V
50-60 Hz