



P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802

TEL: 1-800-265-6681  
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802

PERFORMANCE CHECKSHEET

Model: AV-145C2-PS  
S.N.: 11167  
Date: April 4, 2005

Maximum Gain Test, +40 dB

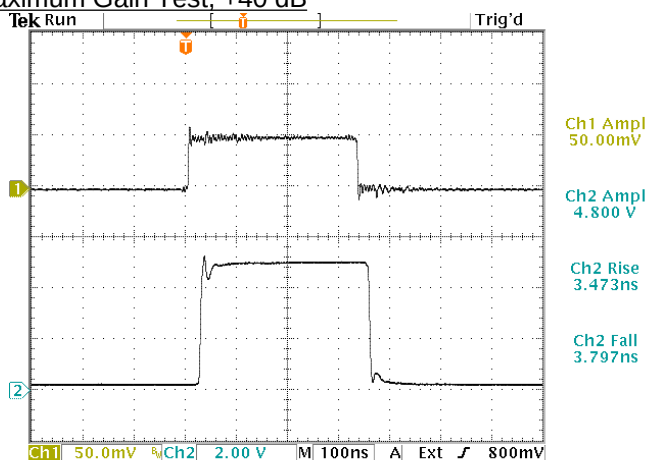


4 Apr 2005  
15:46:46

Top: 50 mV input (50 mV/div, 100 ns/div).  
Bottom: 5V output to a 50Ω load (2 V/div, 100 ns/div).

- a) Output Signal Amplitude: 0 to ±10V
- b) Gain: -40 dB to +40 dB, variable
- c) Rise Time (20%-80%): < 5 ns
- d) Fall Time (80%-20%): < 5 ns
- e) PRF: N/A

Maximum Input Test, +20 dB

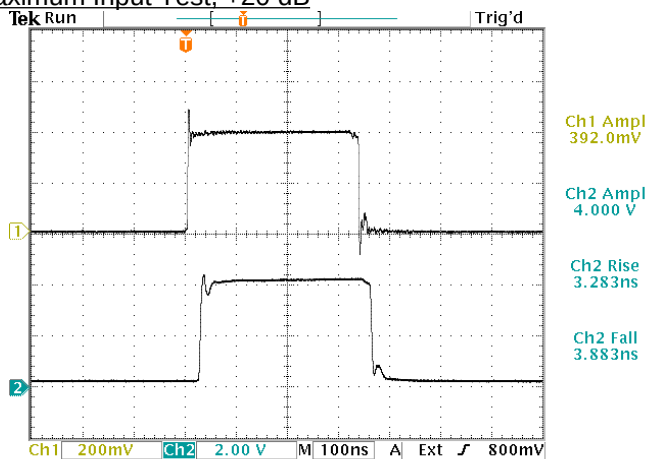

4 Apr 2005  
15:43:48

Top: 400 mV input (200 mV/div, 100 ns/div).  
Bottom: 4V output to a 50Ω load (2 V/div, 100 ns/div).

- f) Jitter, Stability: OK
- g) Prime Power: 100-240V AC, 50-60 Hz.

References levels: 20%, 80%.