



P.O. BOX 265 OGDENSBURG, NY U.S.A. 13669-0265 TEL: (315) 472-5270 FAX: (613) 226-2802


TEL: 1-800-265-6681 FAX: 1-800-561-1970

e-mail: info@avtechpulse.com http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE OTTAWA, ONTARIO CANADA K2C 3H4 TEL: (613) 226-5772 FAX: (613) 226-2802


PERFORMANCE CHECKSHEET

Model: AVR-GHV4-B-P-BR-QTKA S.N.: 11191 Date: June 7, 2005

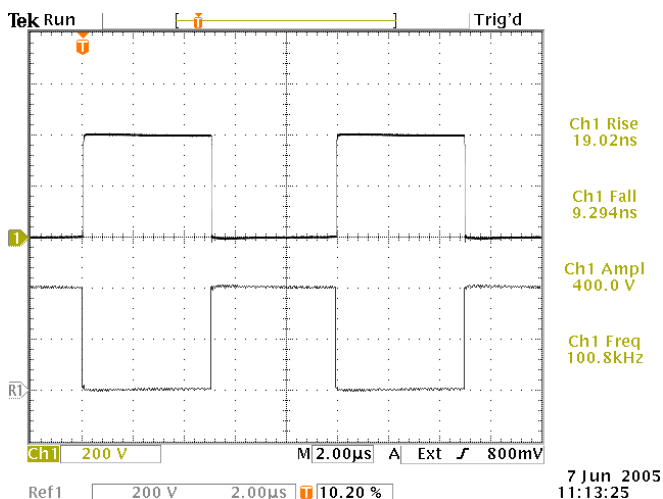

- a) Output Signal Amplitude: 0 to 400V b) Pulse Width (FWHM) : 1 us- 500 ms, 80% maximum duty cycle c) Rise Time (20%-80%): < 30 ns d) Fall Time (80%-20%): < 30 ns e) PRF: 1 Hz - 100 kHz f) Jitter, Stability: OK g) Prime Power: 100-240V AC, 50-60 Hz.

Top: OUT. Bottom: NOT-OUT. Both: 100 kHz, +400V into 100 kΩ loads installed directly on the output connectors. 200 V/div, 2 us/div.

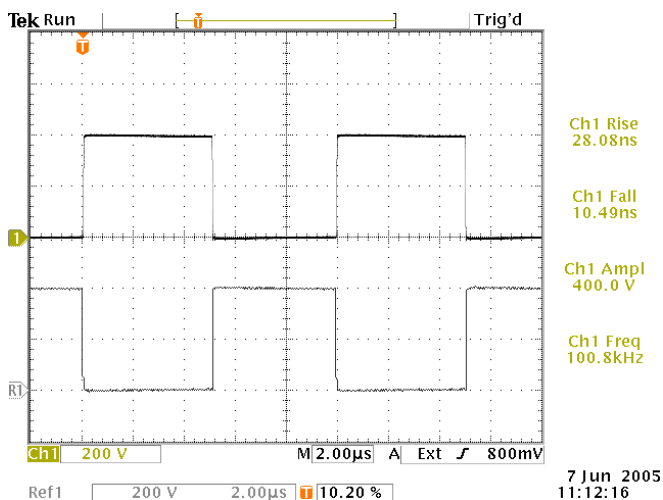

Top: OUT. Bottom: NOT-OUT. Both: 100 kHz, +400V into 100 kΩ loads installed on the ends of 2 meter (6 foot) lengths of coaxial cable. 200 V/div, 2 us/div.

References levels: 10%, 90%.