
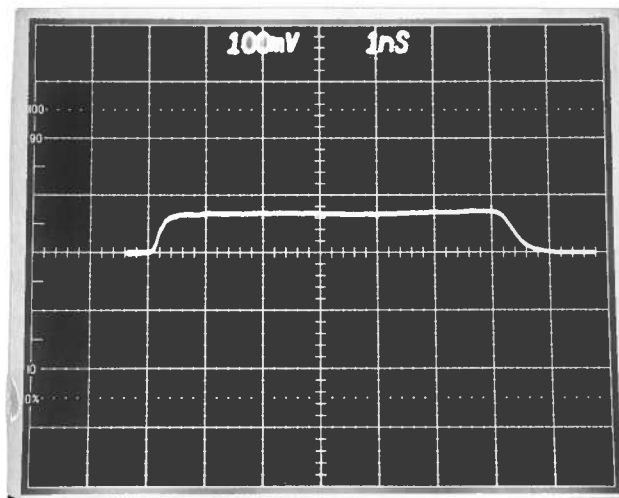


**AVTECH****AVTECH ELECTROSYSTEMS LTD.**NANOSECOND WAVEFORM ELECTRONICS  
SINCE 1975P.O. BOX 265  
OGDENSBURG, NY  
U.S.A. 13669-0265  
TEL: (315) 472-5270  
FAX: (613) 226-2802TEL: 1-800-265-6681  
FAX: 1-800-561-1970e-mail: info@avtechpulse.com  
http://www.avtechpulse.com/ BOX 5120, LCD MERIVALE  
OTTAWA, ONTARIO  
CANADA K2C 3H4  
TEL: (613) 226-5772  
FAX: (613) 226-2802PERFORMANCE CHECKSHEETModel: *AVMM-2-P-EA-EW*S.N.: *11304*Date: *SEPT 22 2005*

*40 dB ATTN*  
*10 V/DIV*  
*PRF = 10 MHz*  
*V<sub>DW</sub> = +5 V*  
*V<sub>AMP</sub> = +3 V*

a) Output Signal Amplitude:

*0 TO +5V (TO 50Ω)*

b) Pulse Width(FWHM):

*1 TO 10 NS*

c) Rise Time (20%-80%):

*≤ 300 ps*

d) Fall Time (80%-20%):

*≤ 600 ps*

e) PRF:

*0 TO 25 MHz*

f) Jitter, Stability:

*OK*

g) Prime Power:

*+24 V DC*  
*500 mA MAX*