



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265
TEL: (315) 472-5270
FAX: (315) 883-1328

TEL: 1-800-265-6681
FAX: 1-800-561-1970


e-mail: info@avtechpulse.com
http://www.avtechpulse.com/

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4
TEL: (613) 226-5772
FAX: (613) 686-6679

PERFORMANCE CHECKSHEET

Model: AVR-3-PS-P-UHF
S.N.: 11410
Date: March 8, 2006


Rise & Fall Time Test

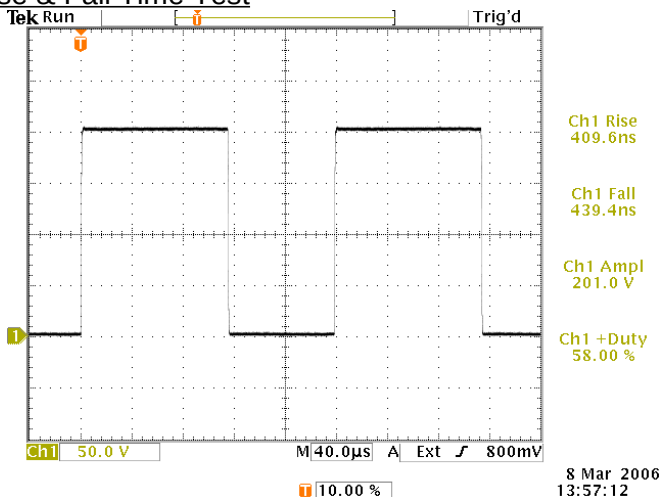

- a) Output Signal Amplitude: 0 to +200V
- b) Pulse Width (FWHM): 2 - 200 us, 57.5% duty cycle
- c) Rise Time (20%-80%): < 1 us
- d) Fall Time (20%-80%): < 1 us
- e) PRF: 1 Hz - 5 kHz
- f) Jitter, Stability: OK

5 kHz, maximum duty cycle, +200V into 500Ω in parallel with 20000 pF. 50 V/div, 40 us/div.

Short Circuit Test

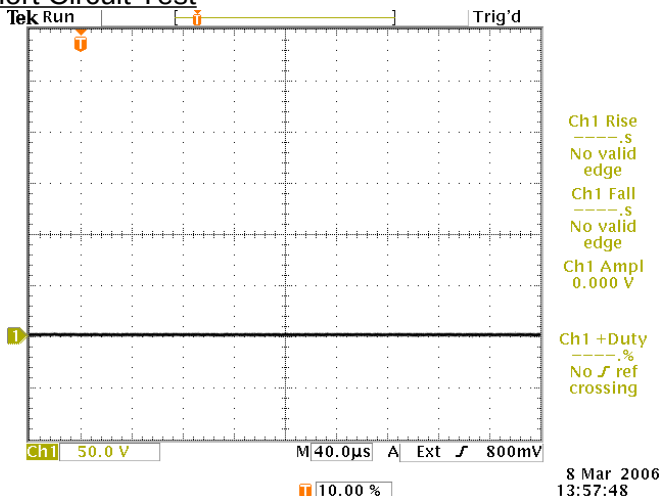

- g) Prime Power: 100-240V AC, 50-60 Hz.

Same settings as above, into a short circuit. No damage occurred. The "Short Circuit" indicator lit.

References levels: 20%, 80%.