



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVOZ-D3-B-P-EA-OSRA-OM10
Type: Pulse Generator
S.N.: 11855
Date: November 9, 2007

Low Amplitude Test

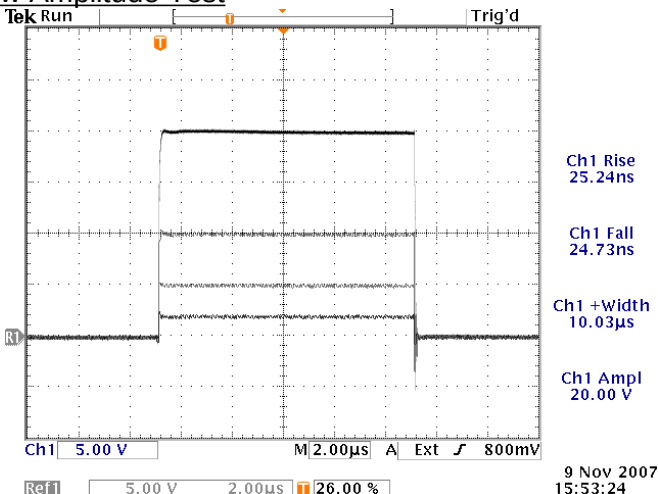

300 Hz, 10 us, into ten 50 Ohm loads (5 Ohms total),
at 2V, 5V, 10V, and 20V amplitudes. 5 V/div, 2 us/div.

a) Output Signal Amplitude: 0 to +200V

b) Pulse Width (FWHM): 200 ns – 10 us

c) Rise Time (20%-80%): < 50 ns


d) Fall Time (80%-20%): < 50 ns

e) PRF: 1 Hz - 5 kHz

f) Jitter, Stability: OK

g) Prime Power: 100-240V AC, 50-60 Hz.

High Amplitude Test

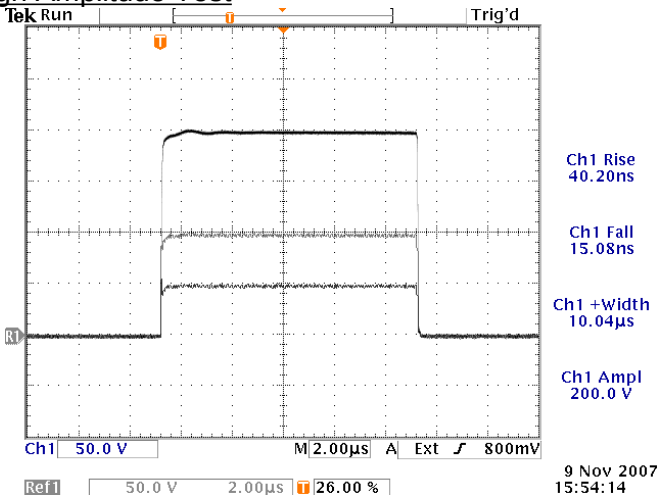

300 Hz, 10 us, into ten 50 Ohm loads (5 Ohms total),
at 50V, 100V, and 200V amplitudes. 50 V/div, 2 us/div.

References levels: 20%, 80%.