



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-226-5772 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-226-2802 (Intl)

BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H4

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVO-9F2-C-N-P2-HPLA
Type: Ultra-High-Speed Pulse Generator
S.N.: 11871
Date: November 26, 2007

Max. Output Amplitude: 340 mA
Pulse Width (FWHM): 0.4 - 1 ns
Rise Time (20%-80%): ≤ 200 ps
Fall Time (80%-20%): ≤ 200 ps
PRF: 25 - 100 MHz
Jitter, Stability: OK
Prime Power: 100-240V AC, 50-60 Hz.

Basic specifications: →



Test Waveforms

At 100 MHz, > -20V, < 0.4 ns, mainframe driving a 50 Ohm load (no output module):

At 50 MHz, > -20V, 0.9 ns pulse width, mainframe driving a 50 Ohm load (no output module):

1 ns/div. 10 V/div (100 mV × 40 dB):

5 ns/div. 10 V/div (100 mV × 40 dB):

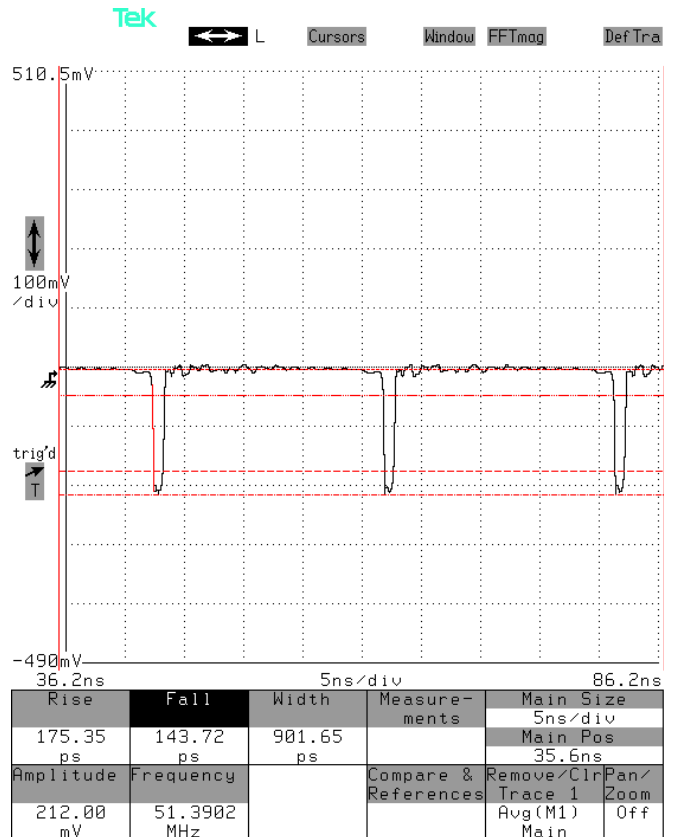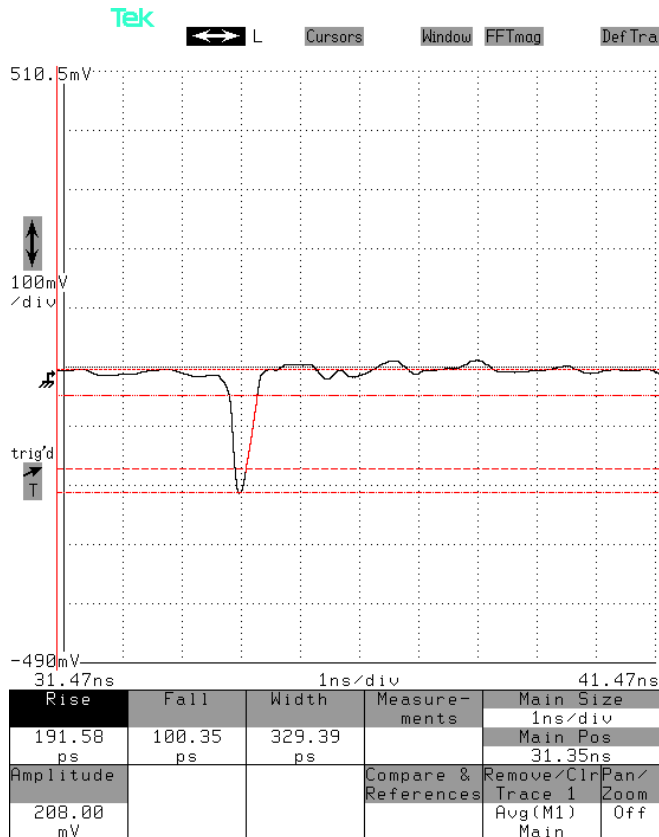

At 50 MHz, ~ 340 mA, 0.7 ns pulse width, mainframe driving the output module with a 1N459 diode in series with 6 Ohms installed in the output socket. The parasitic inductance causes some degradation of the signal. The "MI" output is shown.

1 ns/div. 1 V/div (100 mV × 20 dB):

