



P.O. BOX 265
OGDENSBURG, NY
U.S.A. 13669-0265

TEL: 888-670-8729 (USA & Canada) or +1-613-686-6675 (Intl)
FAX: 800-561-1970 (USA & Canada) or +1-613-686-6679 (Intl)


BOX 5120, LCD MERIVALE
OTTAWA, ONTARIO
CANADA K2C 3H5

info@avtechpulse.com - http://www.avtechpulse.com/

PERFORMANCE CHECKSHEET

Model: AVX-TRR-MIX
Type: Test Jig for AVR-EB4-B
S.N.: 13875
Date: February 20, 2019

With an On Semi 1N4937 installed in the AVX-TRR-MIX test jig, connected using a 60 cm / 24" coaxial cable:

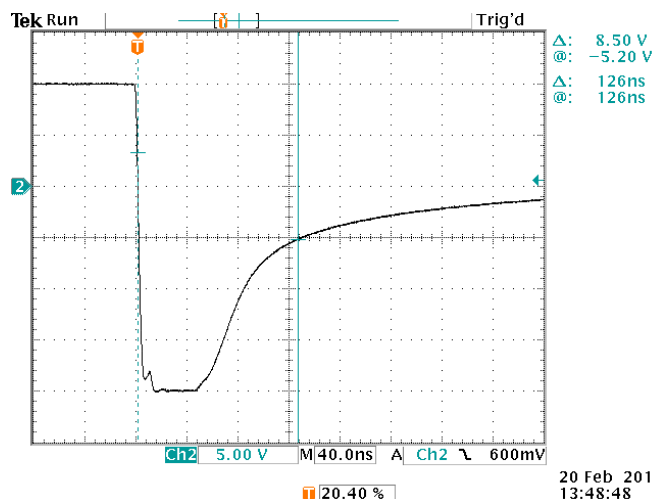

$I_F = +2A, I_R = -4A, I_{RR} = -1A.$

100 Hz, 20 us PW.

5V (1A) / div, 40 ns/div.

Measured $t_{RR} = 126$ ns.

Tested with the AVR-EB4-B internal model.